


# CHC5058

## ASSEMBLY & INSTALLATION GUIDE

### BALDWIN PENDANT - SINGLE

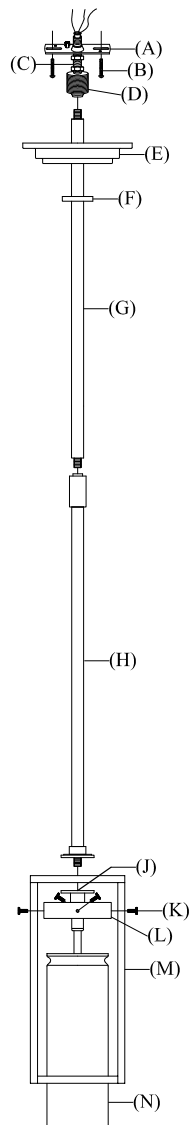

**WE RECOMMEND INSTALLATION OF THIS LIGHTING FIXTURE BE DONE BY A LICENSED ELECTRICIAN.**

**WARNING \*\*\* SWITCH OFF THE MAIN ELECTRICAL SUPPLY FROM THE MAIN FUSE BOX/CIRCUIT BREAKER BEFORE INSTALLATION.**

**INSPECT ITEM CAREFULLY BEFORE ATTEMPTING TO INSTALL. IF THERE IS ANY DAMAGE OR OBVIOUS DEFECT, DO NOT INSTALL.**

**ITEM MAY NOT BE RETURNED ONCE IT HAS BEEN INSTALLED.**

1. Screw lamp pole (H) onto top of opening (J).  
NOTE: THE POLE MUST BE GONE THROUGH THE CENTER HOLE OF LATERN BOX.
2. Remove thumbscrews (K.) from the shade holder (L).
3. Attach glass shade (N) to shade holder (L), and secure by thumbscrews (K.).  
NOTE: DO NOT OVER TIGHTEN OTHERWISE THE GLASS WILL BE DAMAGED.
4. Screw lamp pole (G) to top of opening (H), and tighten by hand.
5. Feed wire through pole (G), (H) and mounting loop (D).
6. Slide canopy (E) and canopy ring (F) on pole (G).
7. Attach mounting strap (A) to ceiling outlet box and secure with mounting screws (B).
8. Insert top thread nipple (C) in mounting strap (A).
9. Attach mounting loop (D) to thread nipple (C).
10. Attach the ground wire (bare wire) from the fixture to the ground junction box wire (usually green or copper wire). Fasten together with a plastic wire connector and wrap the connection with electrical tape. Be sure no wire strands are exposed.
11. Connect the neutral wire from the fixture (ridges molded wire) to the neutral wire from the junction box (usually white). Fasten together with a plastic wire connector and wrap the connection with electrical tape. Be sure no wire strands are exposed.
12. Connect the hot wire from the fixture (smooth wire) to the hot wire (usually black) from the junction box. Fasten each together with a plastic wire connector and wrap the connection with electrical type. Be sure that no wire strands are exposed.  
DO NOT REVERSE THE HOT AND NEUTRAL CONNECTIONS OTHERWISE SAFETY WILL BE COMPROMISED.
13. Tuck the wire connections neatly into the ceiling outlet box.
14. Slip canopy (E) to ceiling and secure with threaded canopy ring (F).
15. Insert light bulb into the socket.
16. Restore power and test fixture. Enjoy your ceiling fixture.