



## Laszlo Pendant Assembly Instructions

### CAUTION:

- **BEFORE INSTALLING FIXTURE, MAKE SURE THE POWER TO THE CIRCUIT IS TURNED OFF AT THE MAIN FUSE BOX / CIRCUIT BREAKER UTILITY BOX.**
- **Do not install into a ceiling that contains radiant heating.**

### Important Safety Instructions:

- These instructions are provided for your safety. It is very important that they are read carefully and completely before beginning the assembly and installation of this lighting fixture.
- We strongly recommend that a professional electrician install all direct wire fixtures
- **THIS PRODUCT MUST BE INSTALLED IN ACCORDANCE WITH THE APPLICABLE INSTALLATION CODES BY A PERSON FAMILIAR WITH THE CONSTRUCTION AND OPERATION OF THE PRODUCT AND THE HAZARDS INVOLVED.**
- The installation is not to be made on a radiant-heating ceiling.
- The lighting fixture is meant for indoor use. It must be connected only to 3-wire, single-phase electrical supply systems (provided with Ground wire or equivalent protection system).
- For your safety, it is strongly recommended that two people install the lighting fixture.
- This fixture has been rated for up to four (4) **40-Watt maximum TYPE B standard (candelabra) incandescent light bulbs** (not included) or four (4) **9-Watt compact fluorescent light bulbs** (not included). To avoid the risk of fire, do not exceed the recommended lamp wattage.
- The lighting fixture is meant for indoor use.
- **Save these instructions.**


### WARNING:

- **To reduce the risk of fire, electrical shock or personal injury, always turn off light fixture and allow it to cool prior to replacing light bulb.**
- **Do not touch bulb when fixture is turned on. Do not look directly at lit bulb.**
- **Keep flammable materials away from lit bulb.**
- **This lighting fixture contains lead, a chemical known to the State of California to cause cancer, birth defects and other reproductive harm. Wash hands after installing, handling, cleaning or otherwise touching this light fixture.**

### Pre-assembly:

- Remove all parts and hardware from box along with any plastic protective packaging.
- Do not discard any contents until after assembly is complete to avoid accidentally discarding small parts or hardware.
- For your safety and convenience, assembly by two people is recommended

### TOOLS REQUIRED (not included):

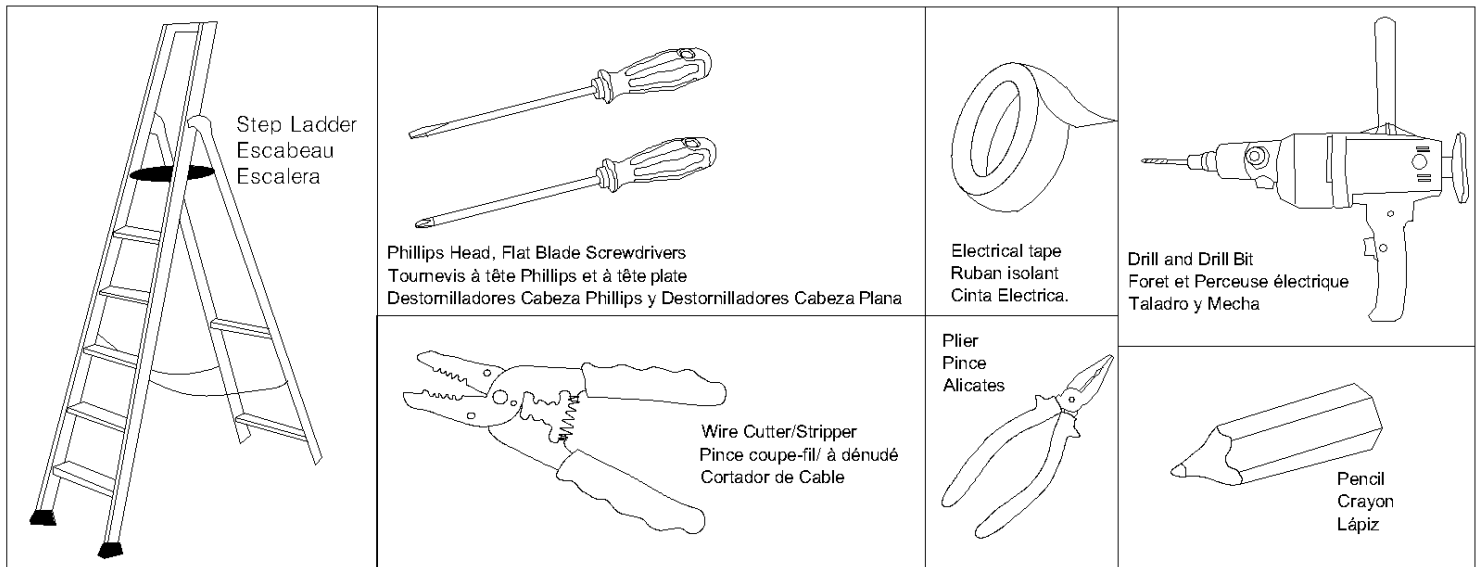


#### Parts Included:

- (A) Mounting Plate (1)
- (B) Canopy (1)
- (C) 13" Connection Rods (4)
- (D) 19" Connection Rods (4)
- (E) Socket Assembly (1)
- (F) Shade (1)
- (G) Diffuser (1)
- (H) Bracket (1)
- (I) Sockets (4)


#### Hardware Enclosed:

- (J) Mounting Screws (2)
- (K) Canopy Screws (4)
- (L) Screws (16)
- (M) Set Screw (2)
- (N) Cap Nuts (4)
- (O) Screws (4)
- (P) Plastic Wire Nut Connector (3)
- (Q) Green Ground Screw (1)

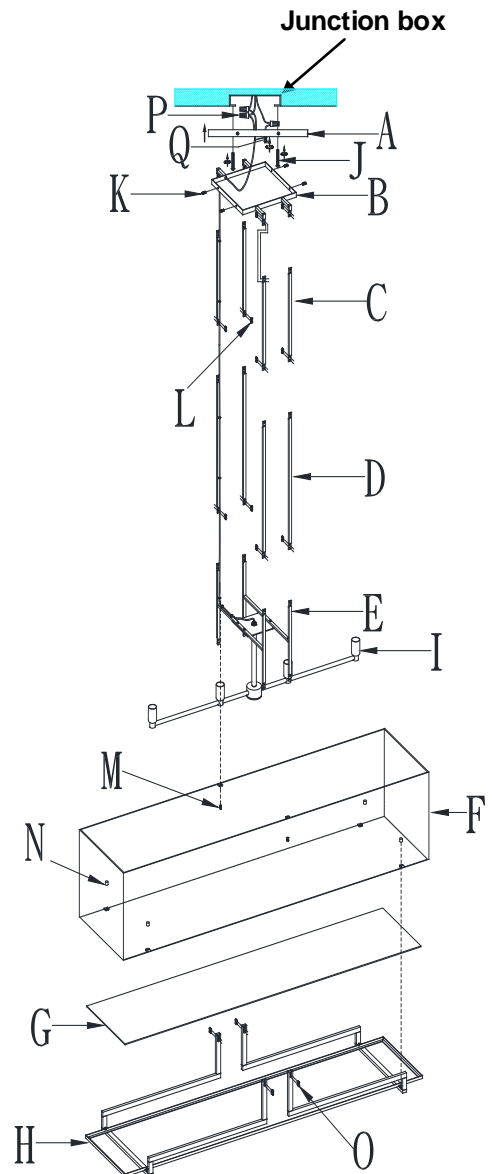


## Assembly & Installation Instructions:


- **SHUT OFF THE MAIN ELECTRICAL SUPPLY FROM THE MAIN FUSE BOX/CIRCUIT BREAKER.**
- Carefully unpack all fixture parts and hardware and lay them on a clear workspace.
- If the parts are not already preassembled or if suspension length adjustments were not made, please use the instruction section above "To Adjust the Suspension Length of the Fixture" for the proper assembly of the Tubes (L&M) to the desired suspension length.

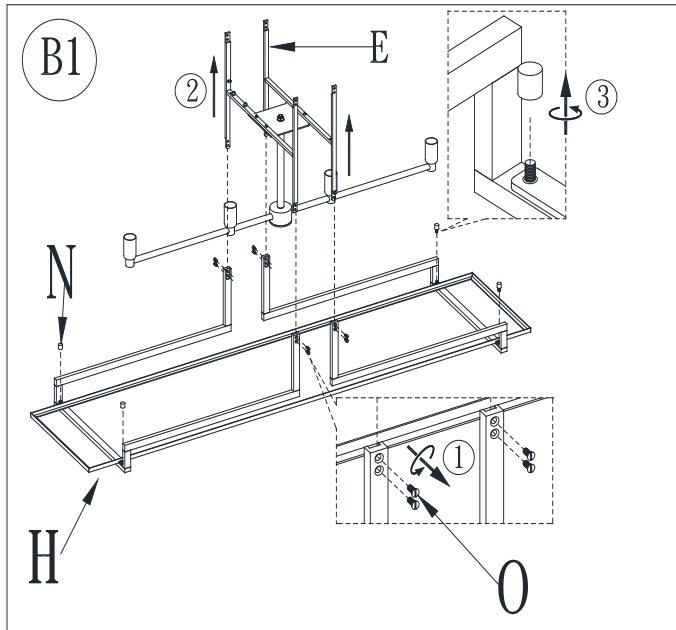


1. Remove Socket Assembly (E) from bracket (H) by removing Screws (O) in a counter-clockwise direction. Remove Cap Nuts (N) from the corner of the Bracket (H) by removing counter-clockwise direction

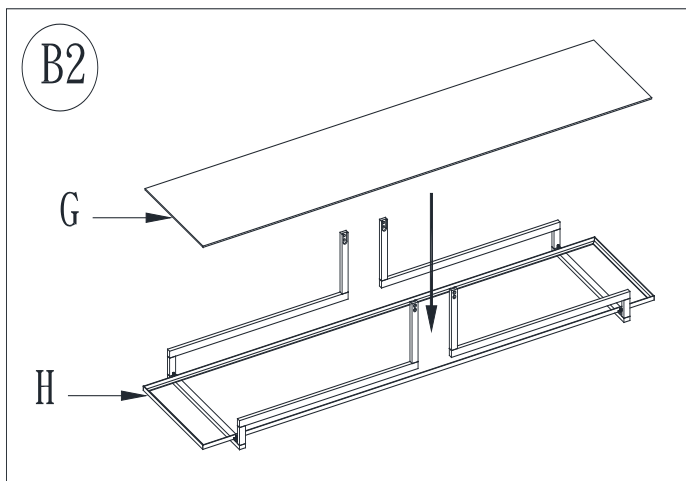


2. Carefully insert the Diffuser (G) into the top opening of Bracket (H).

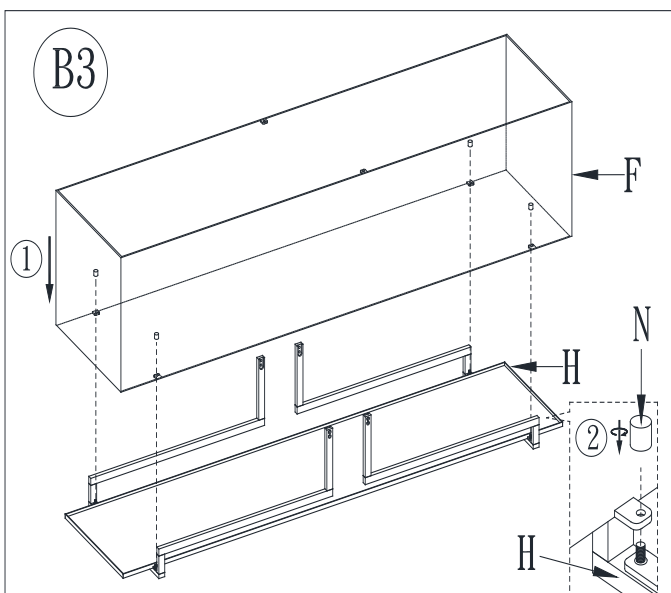


3. Carefully insert Shade (F) into the opening of the Bracket (H) by aligning the holes on four tabs with the bolts inside of the Bracket (H). Screw the Cap Nuts (N) onto the bolts to secure the Shade (F) to the Bracket (H)

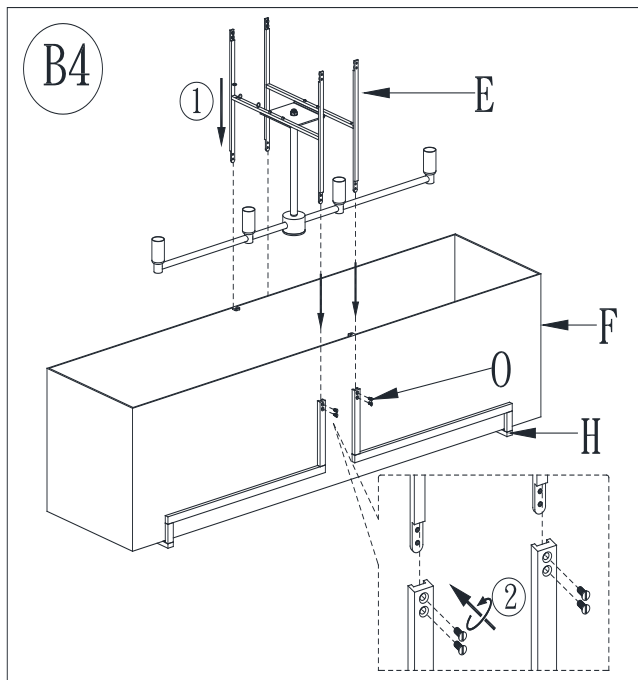


4. Replace the Socket Assembly (E) onto the Bracket (H) by aligning the holes and secure by tightening Screws (O).

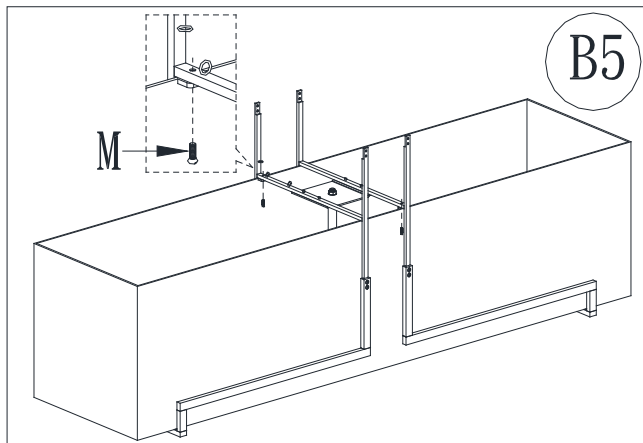


5. Align the holes on both top tabs of Shade (F) with the holes on Socket Assembly (E) and inserting Screws (M) to keep the Shade from bending.

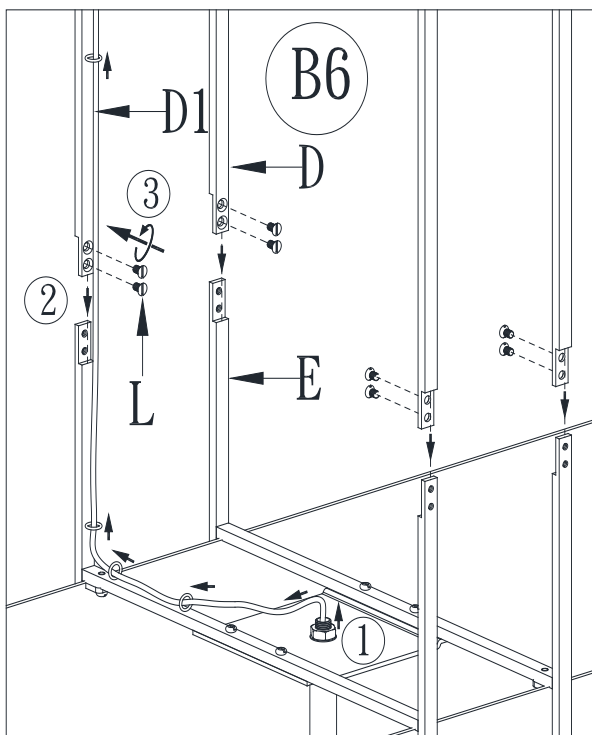


6. Feed the wires through the top rod on Socket Assembly (E) and Rod (D1). Attach Rod (D) and (D1) to the top rod on Socket Assembly (E) and secure with Screws (L).

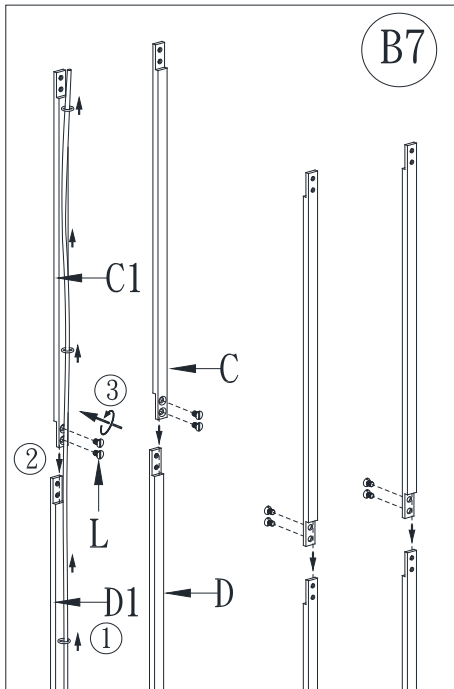


7. Feed the wires through the Rod (C1), attach Rod (C) and (C1) to the Rod (D1) and (D) and secure with Screws (L).

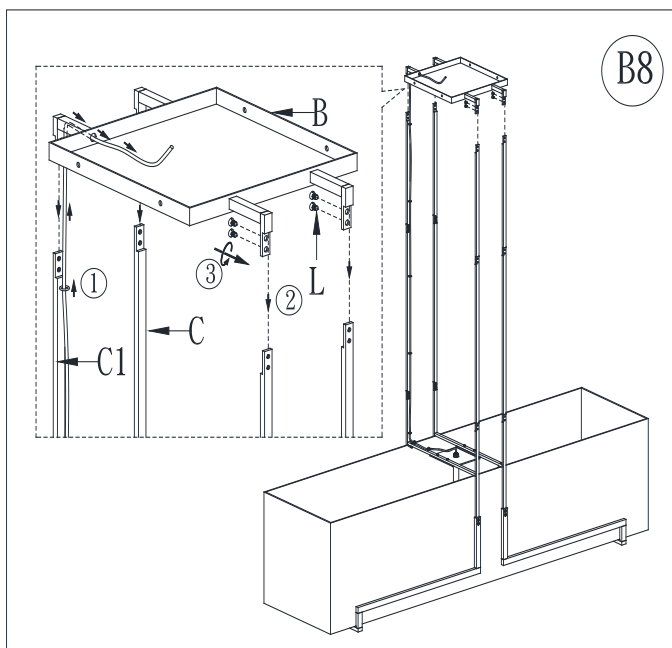


8. Feed the wires through Canopy (B), attach rods (C1) & (C) to the bottom of Mounting Plate (B) and screw with Screws (L).

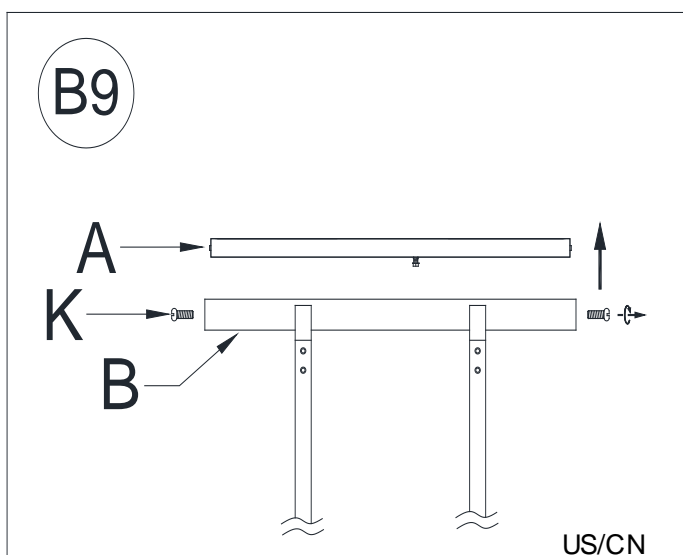


9. Separate Mounting Plate (A) from Canopy (B) by removing Canopy Screws (K) in a clockwise direction, Do not discard the Canopy Screws (K) as these will be used later.

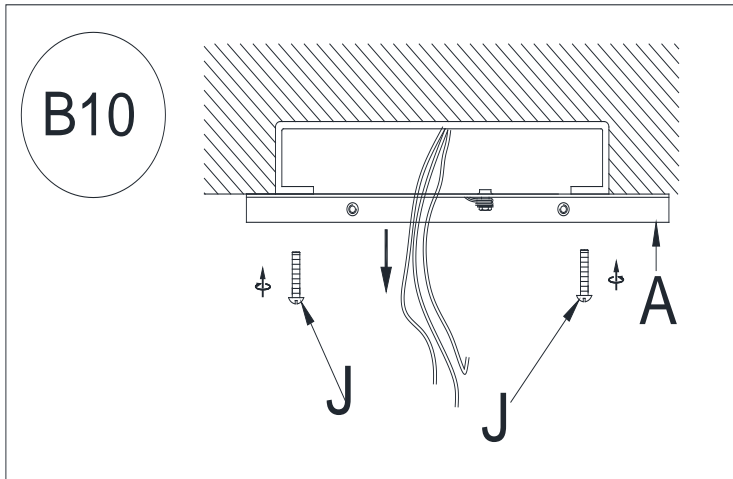

10. Place Mounting Plate (A) to ceiling outlet box with Mounting Screws (J) provided.

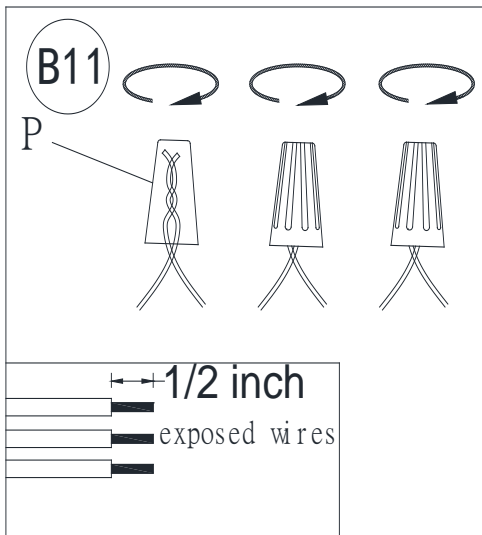


Please read the section” **To Make the Wire Connections**” Below.

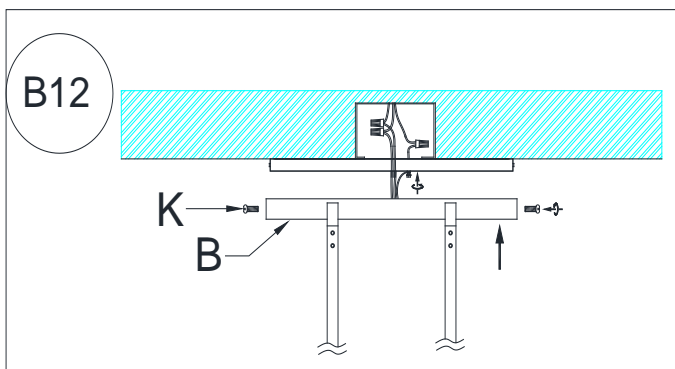

Attach the Canopy (B) onto the Mounting Plate (A) by aligning the holes and secure with Canopy Screws (K).


v

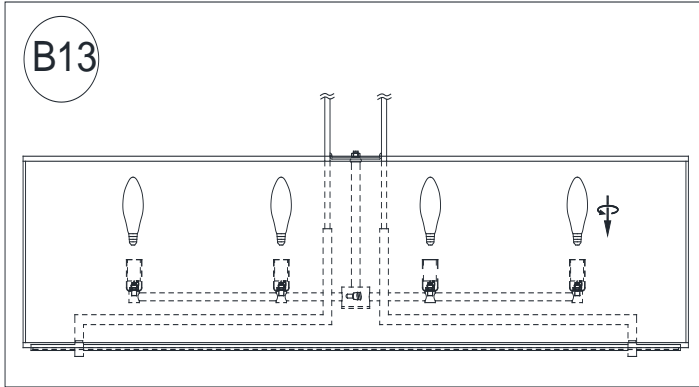


**13. Insert the specified light bulbs into the Sockets (I).** To avoid the risk of fire, do not exceed the recommended lamp wattage as outlined in page 1.


## To Make the Wire Connections:

1. Gently pull the wiring from the ceiling junction box and allow wires to hang. The HOT or LIVE wire is usually black. The NEUTRAL wire is usually white. Check to see if there is a ground wire that is usually green or green with a yellow stripe or exposed copper metal wire. If needed, use a pair of wire strippers to remove about 1/2 inch of insulation from each wire.
2. Carefully inspect the fixtures wires. The NEUTRAL FIXTURE WIRE has FINE LONGITUDINAL RIDGES running along its length. The HOT FIXTURE WIRE is SMOOTH and the BARE COPPER WIRE is the GROUND WIRE. If you have any doubt and cannot identify the power-supply wires with confidence, then we recommend that you ask an electrician and that you not continue with the installation.
3. With the help of another person to hold the weight of the fixture, attach the fixture wires to the junction box wires as shown in the illustrations.

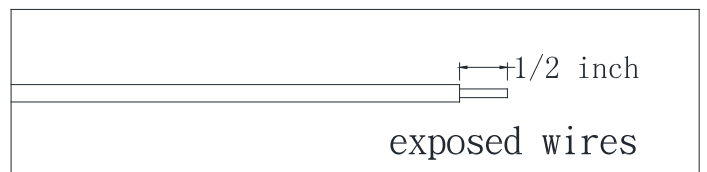


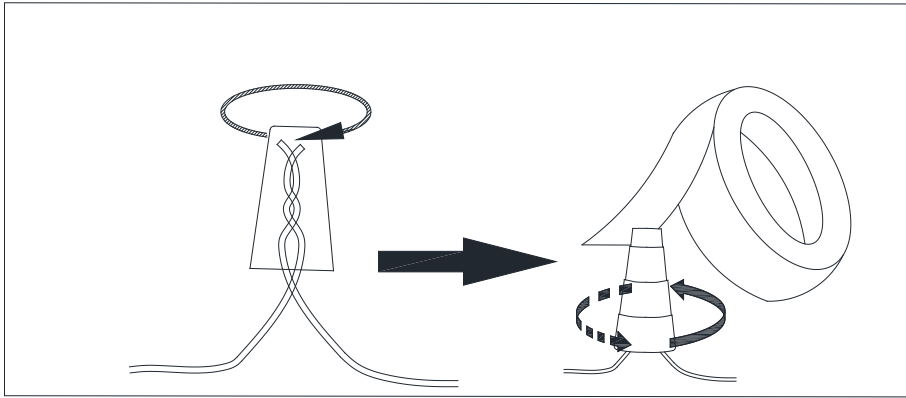

Connect the GROUND FIXTURE WIRE to the GROUND J-BOX WIRE using the Plastic Wire Nut Connector (P) and wrap the connection with electrical tape. Be sure that no wire strands are exposed.

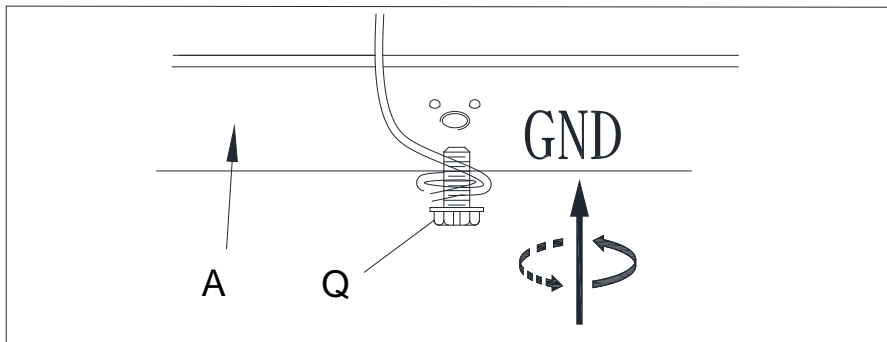

If the junction box DOES NOT have a GROUND WIRE, wrap the fixture's bare ground wire around the Green Ground Screw (Q) and insert the screw into the Mounting Plate (A), marked as "GND", and tighten screw to secure the wire.

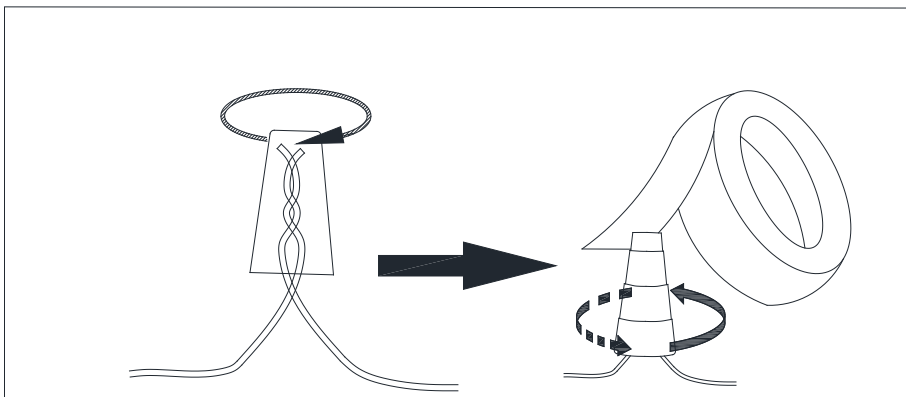

Connect the NEUTRAL FIXTURE WIRE to the NEUTRAL J-BOX WIRE first and then connect the HOT FIXTURE WIRE to the HOT J-BOX WIRE using the Plastic Wire Nut Connectors (P). Wrap these connections with electrical tape. Be sure that no wire strands are exposed.

**NOTE:**

**IT IS IMPERATIVE THAT THE JUNCTION BOX IN YOUR HOME BE PROPERLY GROUNDED!**

**DO NOT REVERSE THE HOT AND NEUTRAL CONNECTIONS OR SAFETY WILL BE COMPROMISED.**

4. Check the wiring connections and if all looks good, gently tuck the wire connections neatly into the ceiling junction box.

**Care instructions:**

- Wipe clean with a soft, dry cloth or static duster.
- Always avoid the use of harsh chemicals or abrasive cleaners as they may cause damage to the fixture's finish.

Thank you for your purchase  
 Stores | catalog | [www.williams-sonoma.com](http://www.williams-sonoma.com)  
 USA 1.877.812.6235