


ASSEMBLY INSTRUCTIONS

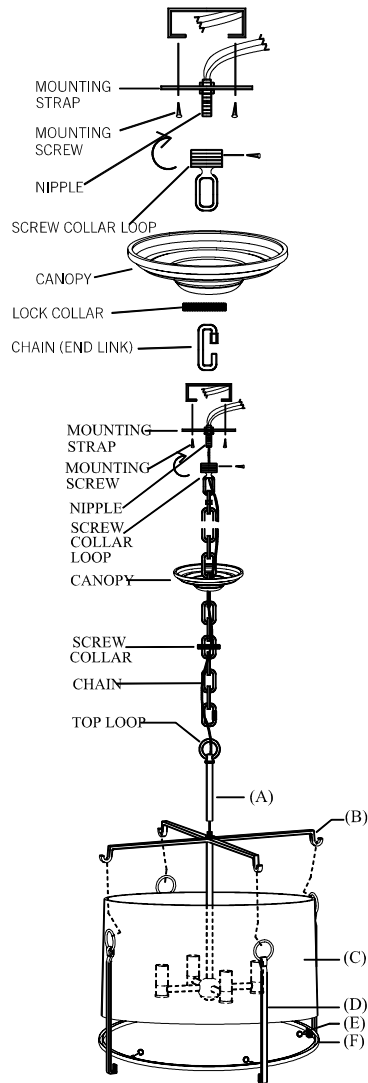

LANDON HANGING PENDANT

Item # S5030

WE RECOMMEND INSTALLATION OF THIS LIGHTING FIXTURE BE DONE BY A LICENSED ELECTRICIAN.

WARNING * SWITCH OFF THE MAIN ELECTRICAL SUPPLY FROM THE MAIN FUSE BOX/CIRCUIT BREAKER BEFORE INSTALLATION.**

INSPECT ITEM CAREFULLY BEFORE ATTEMPTING TO INSTALL. IF THERE IS ANY DAMAGE OR OBVIOUS DEFECT, DO NOT INSTALL.


ITEM MAY NOT BE RETURNED ONCE IT HAS BEEN INSTALLED.

1. Screw connection rod (A) onto top threaded nipple of shade spider (B).
2. Insert shade (C) into top groove of shade rim (F), clip part (D) onto shade rim (F) and secure with cap nut (E). (see illustration)
3. Raise the assembled shade, attach top loop of part (D) onto four hooks at the end of shade spider (B).
4. Shut off the power at the circuit breaker and remove old fixture from ceiling, including the old crossbar.
5. Carefully unpack new fixture and lay all the parts on a clean surface.
6. Thread nipple into screw collar loop until snug. Thread other end of nipple with loop attached into mounting strap until snug.
7. Place lock washer over end of nipple protruding through mounting strap and thread hex nut onto nipple until tight. Take this mounting assembly and mount to ceiling junction box with mounting screws. Tighten screws securely with screwdriver. The side of the mounting strap marked "GND" must face out.
8. Use a pair of pliers to open one end link of the chain provided and connect to the top loop. Close the link.
9. By measuring, determine correct number of links needed for proper hanging height. Using pliers, disconnect and discard remaining chain.
10. Lace the fixture wires through the chain.
11. Slip screw collar over the chain, then do the same with the canopy.
12. Open the other end link of the chain and hang the fixture on the screw collar loop. Close the link.
13. Feed the fixture wires through the screw collar loop and nipple and pull until taut.



VISUAL COMFORT & Co.

ASSEMBLY INSTRUCTIONS

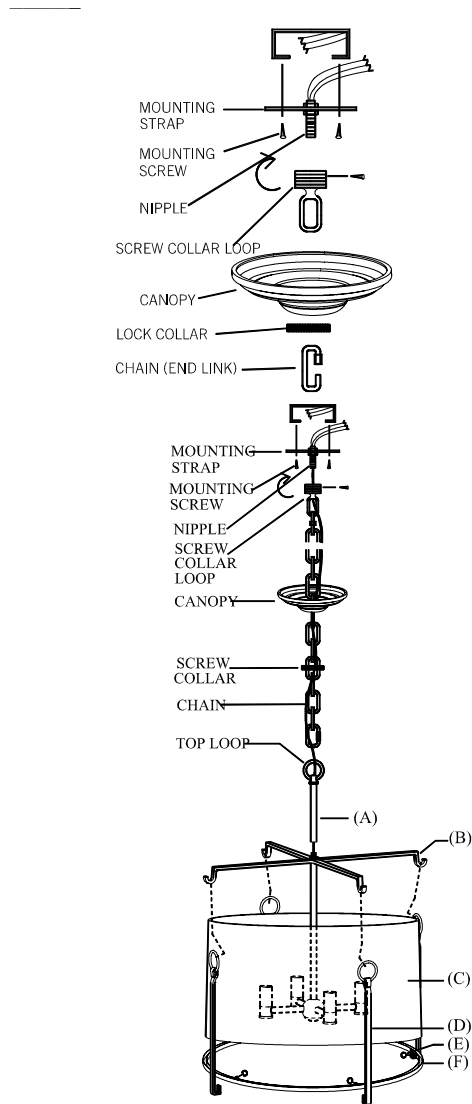

Aspen Large Hanging Shade

Item # S5030

WE RECOMMEND INSTALLATION OF THIS LIGHTING FIXTURE BE DONE BY A LICENSED ELECTRICIAN.

WARNING * SWITCH OFF THE MAIN ELECTRICAL SUPPLY FROM THE MAIN FUSE BOX/CIRCUIT BREAKER BEFORE INSTALLATION.**

INSPECT ITEM CAREFULLY BEFORE ATTEMPTING TO INSTALL. IF THERE IS ANY DAMAGE OR OBVIOUS DEFECT, DO NOT INSTALL.

ITEM MAY NOT BE RETURNED ONCE IT HAS BEEN INSTALLED.

14. At this point, connect the electrical wires as shown in Fig.3 making sure all wire nuts are secured. You may have to wrap the connections with electrical tape. If your outlet has a ground wire (green or bare copper) connect fixture's ground wire to it. Otherwise connect fixture's ground wire directly to the junction box.
15. Tuck these wire connections neatly into the ceiling junction box.
16. Raise the screw collar and thread onto screw collar loop protruding through canopy.
17. Insert light bulbs (NOT INCLUDED) into sockets.
18. Your installation is now complete. Return power to the junction box and test the fixture.



VISUAL COMFORT & Co.