

# WILLIAMS-SONOMA

## Kassel Linear Pendant Assembly Instructions

### Important Safety Instructions:

- These instructions are provided for your safety. It is important that they are read carefully and completely before installing fixture.
- This electric light fixture requires installation by a person familiar with the codes and restrictions in your area. We strongly recommend installation by a licensed electrician. Read and understand these instructions completely before attempting this installation. If you are in any way uncertain of your ability to install this electric light fixture, do not attempt it.
- This fixture has been rated for eight (8) 60-WATT MAX. TYPE C CANDELABRA BULBS (not included). To avoid the risk of fire, do not exceed the recommended wattage.

**WARNING: This lighting fixture contains lead, a chemical known to the State of California to cause cancer, birth defects and other reproductive harm. Wash hands after installing, handling, cleaning or otherwise touching this light fixture.**

### Parts Enclosed:

- (3) Wire nut (A)
- (1) Mounting strap (B)
- (2) Mounting screw (C)
- (1) Ceiling loop (D)
- (1) Canopy (E)
- (1) Lock collar (F)
- (1) Hanging tube (G)
- (1) Crossbar with ring (H)
- (1) "S" cluster (J)
- (1) Rod (K)


### Items you will need:

- Electrical tape
- Wire cutter
- Wire stripper
- Phillips screwdriver

### To Assemble:

#### **BE CERTAIN TO SHUT OFF THE POWER AT THE CIRCUIT BOX OR FUSE PANEL..**

- 1) Gently pull wiring from ceiling outlet box and allow the wires to hang.
- 2) Install the mounting strap (B) with ceiling loop (D) to outlet box by using mounting screws (C) provided.
- 3) Loosen the lock collar (F) and raise the canopy (E) to ceiling loop (D), then thread lock collar (F) loosely to secure.
- 4) Hook side hanging tubes (J) to loop (I) and loop (K) on both ends of fixture.
- 5) Hook hanging tube (G) to crossbar with ring (H).
- 6) Carefully lift and hang the assembled fixture to ceiling loop (D).
- 7) Unwrap the wiring from the top of the fixture assembly.
- 8) Strip the insulation back on the two power supply wires 5/8".
- 9) Twist the power supply and ground wires together and push through the center hole in the ceiling loop (D).
- 10) Loosen the lock collar (D) and slip the canopy down the hanging tube (G).
- 11) Identify the hot wire from the fixture by feeling the edges. The hot wire is smooth and has words printed on it. The common wire is ribbed and has no words on it.
- 12) Attach the bare wire from the fixture to the bare wire from the electrical box using the provided wire nut (A). If your house has no bare wire (ground) attach this wire to the green grounding screw inside the outlet box.
- 13) IT IS IMPERATIVE THAT THIS FIXTURE BE PROPERLY GROUNDED.
- 14) Attach the common wire (ribbed, no words) from the fixture to the white wire from the building using the provided wire nut (A).
- 15) Attach the hot wire (smooth, with words) from the fixture to the black wire from the building with the provided wire nut (A).
- 16) Secure each connection by tightening and then checking that no wires can be pulled out.
- 17) IT IS IMPERATIVE THAT YOU NOT MIX THESE WIRES OR SAFETY WILL BE COMPROMISED.
- 18) Wrap each connection individually with electrical tape.
- 19) Neatly tuck the connections into the outlet box.
- 20) Raise the canopy (E) over the ceiling loop (D) and secure with the lock collar (F).
- 21) Install light bulbs (not included), Maximum 60 wattage Type C into each socket.

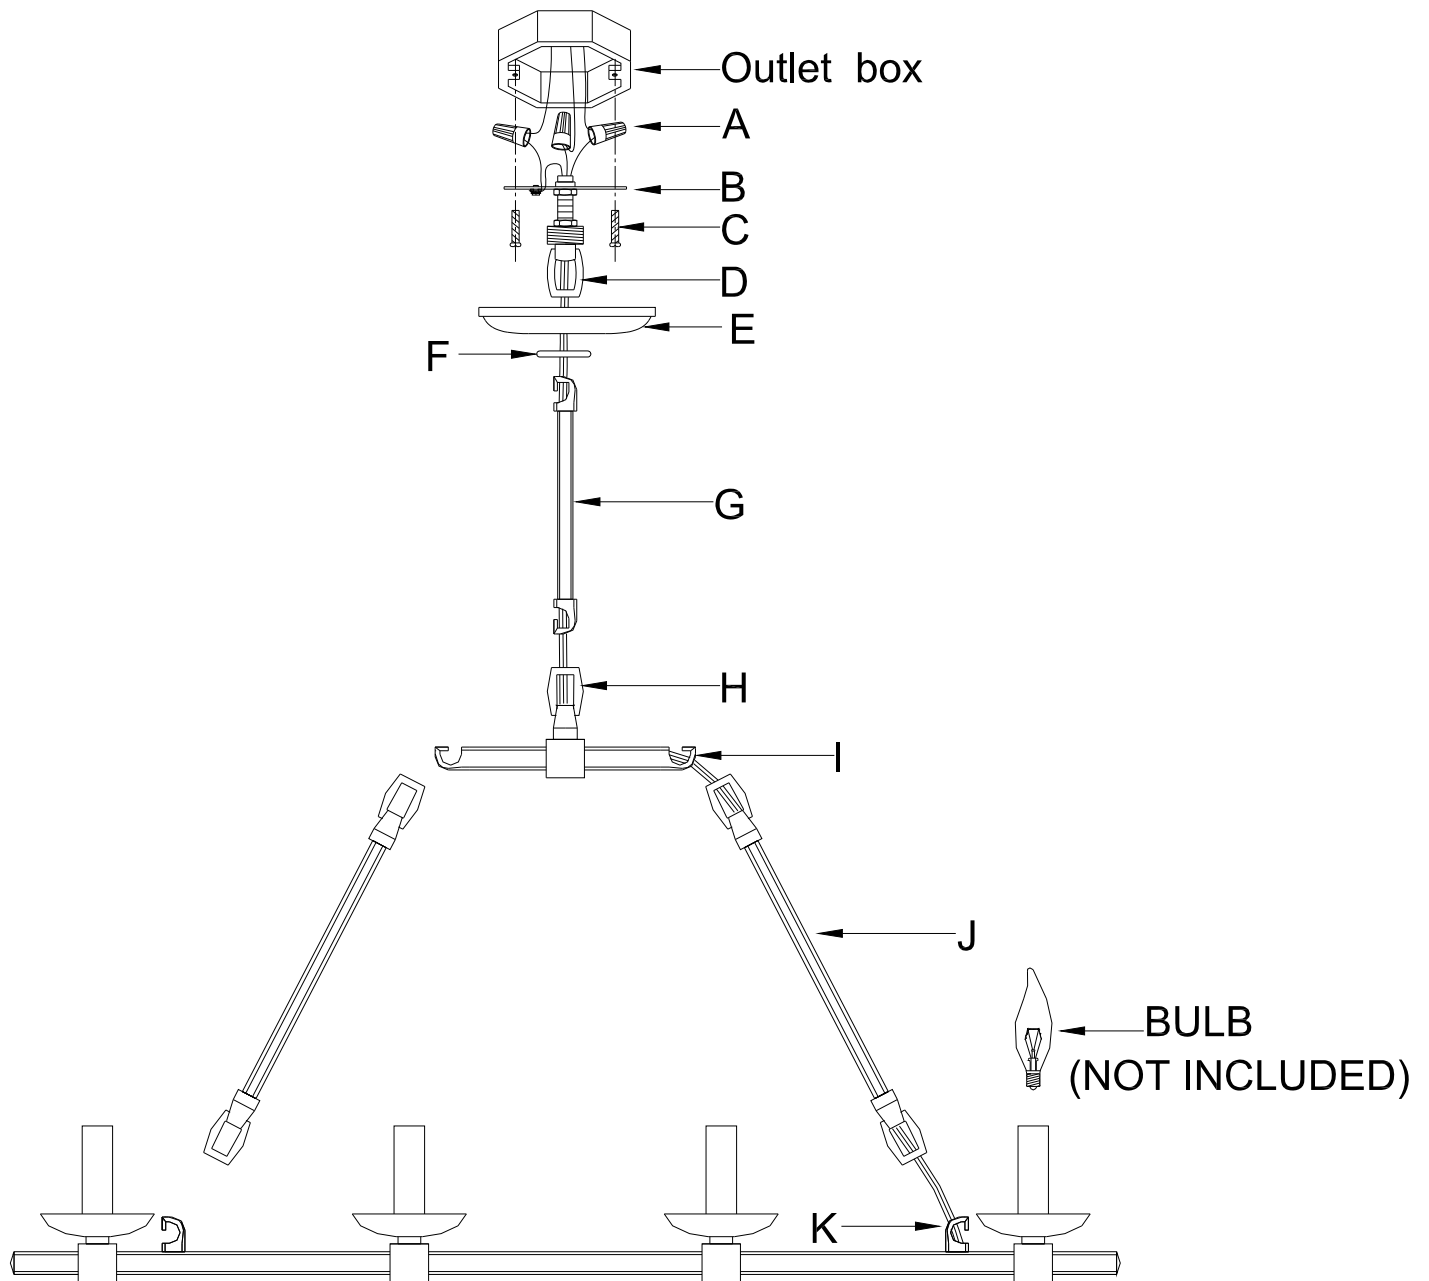

Care Instructions:

- Wipe with soft dry cloth only
- Always avoid the use of harsh chemicals or abrasives as they will damage the finish

Thank you for your purchase

Williams Sonoma, Inc. | Customer Service 1.877.812.6235 | [www.williams-sonoma.com](http://www.williams-sonoma.com)