
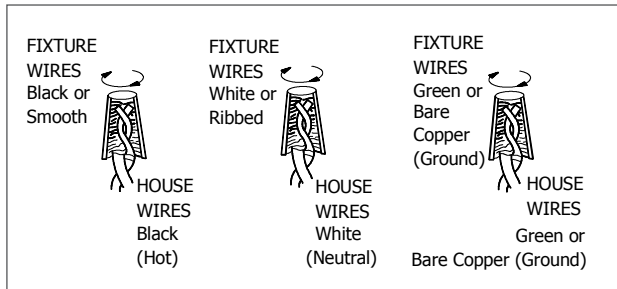
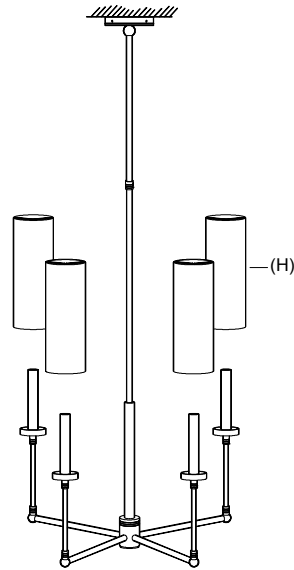


TOB 5015

ASSEMBLY & INSTALLATION GUIDE

GRIFFIN CHANDELIER

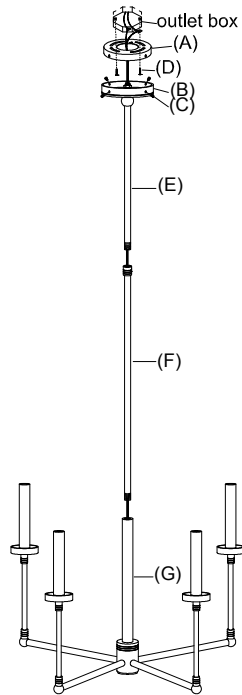

WE RECOMMEND INSTALLATION OF THIS LIGHTING FIXTURE BE DONE BY A LICENSED ELECTRICIAN.

WARNING * SWITCH OFF THE MAIN ELECTRICAL SUPPLY FROM THE MAIN FUSE BOX/CIRCUIT BREAKER BEFORE INSTALLATION.**

INSPECT ITEM CAREFULLY BEFORE ATTEMPTING TO INSTALL. IF THERE IS ANY DAMAGE OR OBVIOUS DEFECT, DO NOT INSTALL.

ITEM MAY NOT BE RETURNED ONCE IT HAS BEEN INSTALLED.

1. Carefully unpack new fixture and lay all the parts on a clean surface.
2. Thread connection pole (F) into top threaded opening of part (G). Thread connection pole (E) into pole (F).
3. Connect fixture wires to wires come from wall outlet.
4. Remove back plate (A) from fixture base (B) by unscrewing base screws (C).
5. Attach back plate (A) to ceiling outlet box and tighten with mounting screws (D).
6. Attach fixture base (B) to the affixed back plate (A) and insert base screws (C) to secure fixture base to the ceiling.
7. Remove clear protective plastic from shade (H).
8. Insert light bulb into socket.
9. Clip lamp shades (H) onto the light bulb.

NOTE: DO NOT EXCEED THE MAXIMUM WATTAGE RATING!

CONNECTING THE WIRES:

1. At this point, connect the electrical wires as shown in the bottom Figure making sure all wire nuts are secured. You May have to wrap the connections with electrical tape. If your outlet has a ground wire (green or bare copper) connect fixture's ground wire to it. Otherwise connect fixture's ground wire directly to the junction box.
2. Tuck these wire connections neatly into the ceiling junction box.
3. Raise the screw collar and thread onto screw collar loop protruding through canopy.
4. Insert light bulbs Type C, maximum 60 watt into sockets.
5. Your installation is now complete. Return power to the junction box and test the fixture.