

IMPORTANT SAFEGUARDS

When using electrical appliances, basic safety precautions should always be followed, including the following:

- Read all instructions.
- Use this appliance only as described in this instruction manual.
As with any electrical appliance, the instructions aim to cover as many situations as possible. Caution and common sense should be used when operating and installing this appliance.
- To protect against fire, electrical shock and personal injury, do not immerse cord, plug or appliance in water or other liquid.
- Never allow the appliance to be used by children.
- Unplug from the outlet when not in use and before cleaning. Allow to cool before fitting or taking off parts, and before cleaning the appliance.
- Do not operate with a damaged cord or plug, or after the appliance malfunctions, or has been damaged in any manner. Return the appliance to the nearest authorized service facility for examination, repair or adjustment.
- The use of accessory attachments or spare parts not recommended by the appliance manufacturer may result in fire, electrical shock or personal injury.
- Do not use outdoors.
- Do not let the cord hang over the edge of the table or counter, or touch hot surfaces.
- Do not place on or near a hot gas or electrical burner, or in a heated oven.
- Plug cord into the wall outlet. To disconnect, turn any control to "off", then remove plug from wall outlet.
- Do not use the appliance for other than the intended use. This appliance is to be utilized for domestic use only. Any other use is to be considered improper and therefore, dangerous.

WARNING: To reduce the risk of fire or electric shock, do not remove the exterior of the unit or the cover. Don't attempt to repair or modify the machine, doing so will void the warranty. Repair should be done by authorized service personnel only!

SAVE THESE INSTRUCTIONS

THIS PRODUCT IS FOR HOUSEHOLD USE ONLY

SHORT CORD INSTRUCTIONS

- A short power cord is provided to reduce risks resulting from becoming entangled in or tripping over a longer cord.
- Longer, detachable power supply cords or extension cords are available and may be used if care is exercised in their use.
- If an extension cord is used, the marked electrical rating should be at least as great as the electrical rating of the appliance. If the appliance is provided with 3- wire, grounding type cord, the extension should be a GROUNDING TYPE 3 - WIRE CORD. The longer cord should be arranged so that it will not drape over the counter-top or table top where it can be pulled on by children or tripped over.
- Your product is equipped with a polarized alternating current line plug (a plug having one blade wider than the other). This plug will fit into the power outlet only one way. This is a safety feature. If you are unable to insert the plug fully into the outlet, try reversing the plug. If the plug should still fail to fit, contact your electrician to replace your obsolete outlet. Do not defeat the safety purpose of the polarized plug.

1. DESCRIPTION

1.1 Description of the appliance

(page 3 - A)

- A1. Bean container lid
- A2. Bean container
- A3. Cup tray
- A4. Steam dial
- A5. Hot water spout
- A6. Steam spout
- A7. Frothing wand selection ring
- A8. Frothing wand
- A9. Frothing wand connection nozzle
- A10. Cup grille for espresso
- A11. Cup grille for glasses or mugs
- A12. Drip tray grille
- A13. Drip tray
- A14. Drip tray water level indicator
- A15. Water tank lid
- A16. Water tank extraction handle
- A17. Water tank
- A18. Water softener filter housing
- A19. Power cord connector socket
- A20. Main switch (ON/OFF)
- A21. Boiler outlet
- A22. Coffee mill outlet (tamping station)
- A23. Tamping lever

1.2 Description of control panel

(page 3 - B)

- B1. ON/Standby button
- B2. Ground coffee quantity dial
- B3. "X2" button: to use the 2 coffees Easy Clean filter
- B4. Rinse button
- B5. "OK" button: to deliver the beverage/confirm
- B6. Hot water button
- B7. "My" button: to customise beverage quantity
- B8. Mode selector dial:
 - Espresso
 - Americano
 - Coffee
 - Descaling
- B9. Descale light
- B10. Steam ready light
- B11. Overtemperature light
- B12. Energy saving light
- B13. General alarm light
- B14. Bean container empty/No Bean container light
- B15. No water light
- B16. Tamping light
- B17. Pressure gauge

1.3 Description of the accessories

(page 2 - C)

- C1. Portafilter
- C2. Easy Clean filter 1 coffee
- C3. Easy Clean filter 2 coffee
- C4. "Total Hardness Test" indicator paper
- C5. Descaler
- C6. Water softener filter (*if present)
- C7. Power cord
- C8. Tube brush
- C9. Milk pitcher

2. PREPARING THE APPLIANCE

Wash all accessories with warm water and washing-up liquid, then proceed as follows:

1. Insert the Bean container (A2) in the coffee mill (fig. 1). The container is correctly inserted when the arrow is lined up with the  symbol and you hear a "click";
2. Insert the drip tray (A13) complete with cup grill (A11) and drip tray grille (A12) (fig. 2);
3. Remove the water tank (A17) (fig. 3) and fill with fresh clean water, taking care not to exceed the MAX level (fig. 4).
4. Put the tank back in the appliance.

Important: *Never operate the appliance without water in the tank or without the tank.*

Please note: *You should customise water hardness as soon as possible following the instructions in section "12.2 Water hardness".*

3. SETTING UP THE APPLIANCE

1. Plug the power cord connector (C7) into the socket (A19) at the back of the appliance (fig. 5), then plug the plug into the mains socket. Make sure the main switch (A20) at the back of the appliance is pressed and in the I position (fig. 6);
2. The  light corresponding to the button (B6) comes on and the  light (B15) flashes to indicate that you need to deliver water to fill the circuit (fig. 7);
3. Place a container with a minimum capacity of 100 ml (3.5 oz) under the hot water spout (A5) and Frothing wand (A8) (fig. 8);
4. Press the button (B6) corresponding to the  light (fig. 9). Delivery begins and stops automatically. Empty the container.

Before using the machine, you must rinse the internal circuits. Proceed as follows:

5. Attach the portafilter (C1) complete with filter to the appliance. To attach correctly, align the portafilter handle with "INSERT" (fig. 10), then turn the handle to the right until it is aligned in the "CLOSE" position;

- Place a container under the portafilter and frothing wand (A8) (fig. 11);
- Press the button (B4) corresponding to the  light. Delivery begins (fig. 12);
- When delivery is complete, turn the steam dial (A4) (fig. 13) and deliver steam for 10 seconds to rinse the steam circuit;
- Repeat points 7 and 8 until you have delivered at least 1 litre of water (about half the tank);
- Remove the water tank (A17) (fig. 3), rinse and fill with fresh clean water, taking care not to exceed the MAX level (fig. 4).

The appliance is ready for use.

Please note: *We also recommend rinsing the internal circuits if the appliance is not used for a long period.*

The first time you use the appliance, you need to make 4-5 cups of coffee before the appliance starts to give satisfactory results. Pay particular attention to the quantity of pre-ground coffee in the filter ((C2) or (C3)) (see instructions in section "4.4 Adjusting the quantity of ground coffee in the filter").

Proceed as described in section "4. Prepare the perfect coffee dose".

4. PREPARE THE PERFECT COFFEE DOSE

4.1 Preparing the coffee grinder

- Make sure the bean container is correctly inserted and lined up to position "3" (fig. 14) (factory setting);
- Remove the bean container lid (A1);
- Place the required quantity of coffee beans in the container (fig. 15);
- Close the lid, pressing firmly.
- The first time you use the appliance, make sure the dial (B2) is in the  position (default setting).

4.2 Select the coffee grinding (coarse to fine)

The grinding level affects delivery speed and therefore the quality of the coffee extraction.

The first time you use the machine, we recommend using the factory setting (medium grinding, setting "3") (fig. 14), then if you are not satisfied with the result, adjust the level according to your personal taste and the type of coffee by setting a finer (setting "1") or coarser grinding level (setting "6"), referring to the tips in section "4.4 Adjusting the quantity of ground coffee in the filter".

Important:

- Always adjust the coffee grinder while in operation.*
- Adjust one grinding level at a time and make at least 5 coffees before adjusting again.*
- Do not remove the bean container while it contains beans.*
- If you want to use a flavored coffee, please use preground coffee in the portafilter as opposed to flavored beans. See section "7. Using pre-ground coffee".*

4.3 The coffee filters

The appliance is provided with two coffee filters.

The 1 coffee filter (C2) has the  symbol marked on the bottom.

The 2 coffee filter (C3) has the  symbol marked on the bottom.

For the perfect coffee dose, the ideal level of tamped coffee is marked inside the filters (fig. 16). If the quantity is above or below the level indicated, the result may not be satisfactory. The next times you use the coffee grinder, you can adjust the grinding level using the dial (B2) (see section "4.4 Adjusting the quantity of ground coffee in the filter").

4.4 Grind the coffee directly into the filter

- Place the ground coffee filter (C2) or (C3) in the portafilter (C1) (fig. 17);
- Press the "X2" button if you are using the 2 coffee filter;
- Attach the portafilter to the outlet of the coffee grinder (A22), aligning it with "INSERT", then turning it to the right (fig. 18). Grinding begins when the portafilter reaches the CLOSE position and stops automatically;

Important: *while the appliance is grinding coffee, you can perform a rinse, or produce hot water or steam at the same time.*

- Once grinding is complete, the  light (B16) flashes. Pull the tamping lever (A23) as far as it will go. The force exerted on the coffee is indicated on the lever itself ( (fig. 19). The  light remains on steadily.
- Remove the portafilter by turning it towards the left.


Important:

- To adjust the correct quantity ground automatically into the portafilter, see section "4.4 Adjusting the quantity of ground coffee in the filter".*
- A second grinding cycle could begin if portafilter is removed before grinding cycle is completed and portafilter reinserted. Please listen for grinding to complete before adjusting portafilter or tamping.*


If you remove the portafilter from the outlet of the coffee grinder without tamping the coffee, the  light (B16) flashes. To press, turn the dial (B2) to the  position to disable the coffee mill, re-attach the portafilter and pull the lever (A23).

4.5 Adjusting the quantity of ground coffee in the filter

Important: *The first time you use the coffee grinder, leave the ground coffee quantity dial (B2) in the  position (min). It is normal for you to have to grind the coffee a number of times before finding the correct adjustment for the perfect coffee dose.*

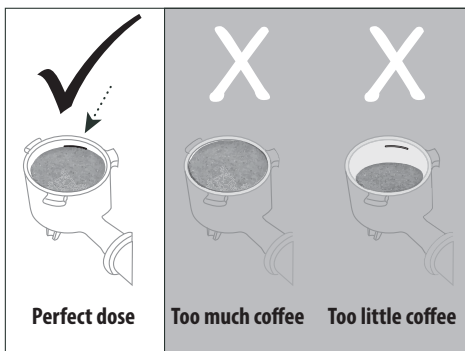

After grinding coffee for the first time, turn the dial gradually, starting from the ☐ "min" position (see following figure) until you reach the correct quantity, depending on the type of coffee. The ideal position is within the sector shown in grey in the following figure.

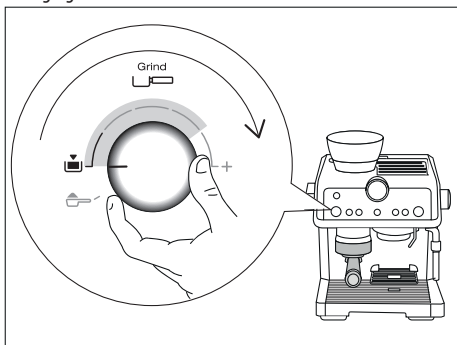

By adjusting this dial, you can adapt the grinding to any type of coffee and to wear of the burrs over time.

4.6 Grinding adjustment over time

Over time, the burrs will wear down and the quantity of ground coffee will diminish. If you are unable to achieve the ideal quantity of coffee outlined in section "4.4 Adjusting the quantity of ground coffee in the filter" even after turning the dial (B2) to + position, contact De'Longhi Customer Service who will guide you to reach the perfect dose again (see "www.delonghi.com").

5. COFFEE DELIVERY

5.1 Beverage selection

1. Turn the mode selector dial (B8) to select the desired coffee (see section "5.4 Coffee beverages").
2. If you use the 2 cup filter (C3), press the "2X" button (B3).

5.2 Delivering the coffee

1. Attach the portafilter (C1) to the appliance. To attach correctly, align the portafilter handle with "INSERT" (fig. 10),

then turn the handle to the right until it is aligned in the "CLOSE" position;

2. Place the cup or cups under the portafilter spouts;
3. If you are using small cups, lower the cup grille (A10) to bring the portafilter spouts nearer the cup. This makes a better crema (fig. 20);
4. Using the dial (B8), select the desired beverage.
5. Press the "OK" button. The appliance makes the coffee then stops automatically.

Please note: While the machine is making coffee, delivery can be interrupted at any moment by pressing the "OK" button. To remove the portafilter, turn the handle from right to left.

Danger of burns

- To avoid splashes, never remove the portafilter while the appliance is delivering coffee. Wait for a few seconds after delivery.
- If no coffee is delivered, then wait for about 1 minute before removing the portafilter. There could be a puff of steam caused by the residual pressure inside the appliance.

5.3 Pressure gauge

The pressure gauge enables you to check that pressure is correct while the coffee is being delivered (fig. 21).

While making ESPRESSO coffee, the indicator will initially be in the "pre-infusion" sector and will then rotate to the "optimal zone" during delivery.

For more information, see section "16. How to make perfect coffee".

Important:

- The pressure gauge only operates while coffee beverages are being made. If you are preparing hot water "☐" or using the steam function, the pressure gauge indicator does not move.
- If the indicator goes on the red sector (over-pressure level):
 - be sure that the coffee filter is thoroughly cleaned;
 - check the quantity of ground coffee in the filter: never exceed the mark impressed in the filter (perfect dose).

5.4 Coffee beverages

ESPRESSO

Beverage of Italian origin, a short coffee with an intense aroma.

Coffee	Pre-infusion	Quantity	Filter	×2
Espresso ☐	✓	1 cup 1.2 fl oz / 35 ml	C2 	✗
		2 cups 2.4 fl oz / 70 ml	C3 	✓

Always check that there is the right amount of coffee in the filter (see section "4.4 Adjusting the quantity of ground coffee in the filter").

• COFFEE

Beverage of European origin, a long coffee with a delicate aroma.

Coffee	Pre-infusion	Quantity	Filter	×2
	X	1 cup 2.4 fl oz / 70 ml	C2 	X
		2 cups 4.7 fl oz / 140 ml	C3 	✓

Always check that there is the right amount of coffee in the filter (see section "4.4 Adjusting the quantity of ground coffee in the filter").

• AMERICANO

Beverage of American origin, a long coffee. Made by delivering an espresso, followed by hot water added directly to the cup. Only one cup can be made at a time.

Coffee	Pre-infusion	Quantity	Filter	×2
	✓	1 cup 4.1 fl oz / 120 ml	C2 	X
		RECOMMENDED:		
		1 cup 8.1 fl oz / 240 ml	C3 	✓

Always check that there is the right amount of coffee in the filter (see section "4.4 Adjusting the quantity of ground coffee in the filter").

6. CUSTOMISING THE VOLUME OF COFFEE BEVERAGES WITH THE BUTTON (B7)

1. Prepare the appliance to deliver 1 or 2 cups of the coffee beverage you want to make, as far as attaching the portafilter (C1) complete with the (C2) or (C3) filter and ground coffee.
2. Turn the dial (B8) to select the coffee to be programmed.

3. Press the  button: the light corresponding to the "OK" button (B5) comes on steadily and the light corresponding to the  button flashes.
4. Press the "OK" button to start delivering the beverage. The lights corresponding to the "OK" and  buttons flash.
5. When you have reached the desired quantity of the beverage, press the "OK" button again.
6. Press the  button to save the new setting. The appliance is ready for use again and the  button remains on.

If you do not want to save the new setting, press any other button.

Programming Americano coffee: follow the procedure described above for the quantities of both coffee and hot water.

Please note:

- You can programme coffee beverages, but not steam and hot water.
- Programming changes the quantity of the beverages, but not the amount of coffee ground.
- "X2" beverages can be programmed separately.

6.1 Beverage reset

To reset the default beverage quantities, press and hold the  button (B7) until it goes off.

The selected beverage is reset to the default values.

7. USING PRE-GROUND COFFEE

1. Place the ground coffee filter (C2) or (C3) in the portafilter (C1) (fig. 17);
2. Place the quantity of ground coffee in the filter;
3. Turn the dial (B2) to the  position to disable the coffee mill;
4. Attach the portafilter to the outlet of the coffee mill (A22), aligning it with "INSERT", then turning it to the right (fig. 10).
5. Pull the tamping lever (A23) as far as it will go. The printing on the lever indicates the tamping force exerted ( (fig. 19).
6. Remove the portafilter by turning it towards the left.

8. DELIVERING HOT WATER

1. Choose the cup and place it on the correct cup grille ((A10) or (A11)).
2. Press the  button (B6): the appliance delivers hot water from the spout (A5) then goes off automatically.
3. To interrupt delivery, press the  button again.

9. HOW TO MAKE MILK-BASED BEVERAGES

1. Pour the quantity of milk you want to heat/froth into the milk jug (C9), remembering that the volume of milk doubles or triples in volume. For a denser more even froth, you

should ideally use milk at refrigerator temperature (about 5°C).

- Choose the position of the ring (A7) (fig. 22) according to the beverage to be prepared (see following table):

Recommended position	Milk beverage to be prepared
FLAT 	Hot milk (not frothed) / Caffelatte / Macchiato / Flat White
FOAM 	Cappuccino, Espresso Macchiato, Hot Milk (frothed)

- Place the jug (C9) containing the milk under the frothing wand (A8) (fig. 23).
- Immerse the frothing wand in the milk jug. Never immerse the black ring (fig. 24).
- Turn the dial to the  position (fig. 25). Steam to heat the milk is delivered from the frothing wand. If the ring is in the FOAM position, the steam gives the milk a creamy frothy appearance (fig. 26). To obtain a creamier froth, immerse the frothing wand in the milk and rotate the container with slow up and down movements.
- When the required temperature (the ideal is 60°C/140°F) and froth density is reached, interrupt steam delivery by turning the dial to the  position.
- For beverages requiring it, prepare the coffee (see section "4. Prepare the perfect coffee dose"). Choose sufficiently large cups and place them on the espresso cup grille (A10). To use tall glasses, close the espresso cup grille (A10) and rest the glass on the cup grille for glasses or mugs (A11).
- Pour the frothed milk into the cups. Sweeten to taste and if desired, sprinkle the froth with a little cocoa powder.

Please note: Preparing cappuccino: consider about 100 g (3.3 fl oz) of milk for each cup.

10. CLEANING THE FROTHING WAND AFTER USE

For hygiene reasons, the frothing wand should always be cleaned after use.

Proceed as follows:

- Turn the steam dial to the  position to deliver a little steam for a few seconds (points 2, 5 and 6 of the previous section). This causes the frothing wand to discharge any milk left inside.
- Press the (B1) ON/Standby button to turn the appliance off.
- Wait a few minutes for the frothing wand to cool down. With one hand, hold the frothing wand tube firmly, with the other, release the frothing wand by turning it anticlockwise, then pull off downwards (fig. 27).
- Remove the rubber steam connection nozzle from the spout by pulling it downwards (fig. 28).

- Push the ring upwards and make sure the two holes shown by the arrows in fig. 29 are not blocked. If necessary, clean with a pin;
- Replace the connection nozzle, move the ring downwards and put the frothing wand back on the nozzle, turning it and pushing it upwards until it is attached.

For more thorough cleaning, use De'Longhi detergent.

11. ACTIVATING THE WATER SOFTENER FILTER

Certain models are fitted with a water softener filter (C6). If this is not the case with your model, you are recommended to purchase one from De'Longhi Customer Services.

To use the filter correctly, follow the instructions below.

- Remove the filter from the packaging;
- Turn the date indicator disk (fig. 30) until the next 2 months of use are displayed;

Please note: The filter lasts about two months if the appliance is used normally. If the coffee machine is left unused with the filter installed, it will last a maximum of 3 weeks.

- To activate the filter, run tap water through the hole in the filter (fig. 31) until water comes out of the openings at the side for more than a minute;
- Extract the tank (A17) (if necessary fill with water);
- Insert the filter in the water tank and immerse it completely for about ten seconds, sloping it and pressing it lightly to enable the air bubbles to escape (fig. 32);
- Place the filter in the filter housing (A18) and press as far as it will go. Close the tank, then put the tank back in the machine;

The filter is now active and you can use the coffee machine.

12. MENU SETTINGS

Please note: Once in the menu, you can modify all the menu functions as described in the following sections.

12.1 Coffee temperature

To change the temperature of the water used to make the coffee, proceed as follows:

- Press and hold the $\times 2$ (B3) and  (B7) buttons together for at least 3 seconds to access the menu. The  (B15) and  (B16) lights alternate;
- Turn the mode selection dial (B8) to the  ESPRESSO position. The  light (B11) remains on steadily;
- Press the button corresponding to the desired selection as shown in the following table:

Button	Temperature
$\times 2$	Standard
	High

- Press the  button (B1) to exit the menu. (If the appliance is left idle for about 1 minute, it exits automatically from the settings menu and returns to regular use mode).

12.2 Water hardness

The  descale light (B9) comes on after a period of time established according to water hardness. The machine can also be programmed according to the actual hardness of the water supply in the various regions, in which case descaling may be required less frequently.

Proceed as follows:

1. Remove the "TOTAL HARDNESS TEST" indicator paper (C4) from its pack.
2. Immerse the paper completely in a glass of water for one second.
3. Remove the paper from the water and shake lightly. After about a minute, 1, 2, 3, or 4 red squares form, depending on the hardness of the water. Each square corresponds to one level.
4. Press and hold the $\times 2$ (B3) and  (B7) buttons together for at least 3 seconds to access the menu. The  (B15) and  (B16) lights alternate;
5. Turn the mode selection dial (B8) to the  AMERICANO position. The  light (B9) remains on steadily;
6. Press the button corresponding to the desired selection as shown in the following table:

Total Hardness Test result	Button	Level
	$\times 2$	1 soft water
		2 medium water
		3 hard or very hard water

7. Press the  button (B1) to exit the menu. (If the appliance is left idle for about 1 minute, it exits automatically from the settings menu and returns to regular use mode).

12.3 Auto-off

Auto-off can be set so that the appliance goes off after 9 minutes, one and a half hours, or three hours. Proceed as follows:

1. Press and hold the $\times 2$ (B3) and  (B7) buttons together for at least 3 seconds to access the menu. The  (B15) and  (B16) lights alternate;
2. Turn the mode selector dial (B8) to the  COFFEE position: The  light (B13) remains on steadily;
3. Press the button corresponding to the desired selection as shown in the following table:

Button	Time
$\times 2$	9 minutes
	1.5 hours
	3 hours

4. Press the  button (B1) to exit the menu. (If the appliance is left idle for about 1 minute, it exits automatically from the settings menu and returns to regular use mode).

12.4 Default values

The appliance can be reset to the default values. Proceed as follows:

1. Press and hold the $\times 2$ (B3) and  (B7) buttons together for at least 3 seconds to access the menu;
2. Press and hold the  button for a few seconds until the corresponding light starts flashing;
3. Press the  button (B1) to exit the menu. (If the appliance is left idle for about 1 minute, it exits automatically from the settings menu and is ready for use again).

12.5 Energy saving

Use this function to enable or disable energy saving. When enabled, the function reduces energy consumption in compliance with European regulations.

Proceed as follows:

1. Press and hold the $\times 2$ (B3) and  (B7) buttons together for at least 3 seconds to access the menu;
2. Press the  button (B6). The light (B12) comes on ;
3. Press the  button (B1) to exit the menu. (If the appliance is left idle for about 1 minute, it exits automatically from the settings menu and is ready for use again).

Please note:

- If energy saving mode is active, you may have to wait a few seconds before delivery.
- When energy saving mode is disabled, steam is delivered immediately.

13. CLEANING

13.1 Cleaning the machine

The following parts of the machine must be cleaned regularly:


- drip tray (A13) complete with cup grille (A11) and drip tray grille (A12);
- espresso cup grille (A10);
- coffee filters (C2) and (C3);
- the bean container (A2);
- the coffee grinder burrs;
- the coffee grinder outlet (A22) (smart tamping station);
- boiler outlet (A21);
- water tank (A17);
- frothing wand (A8) as described in section "10. Cleaning the frothing wand after use".

Important!

- Do not use solvents, abrasive detergents or alcohol to clean the coffee machine.
- Do not use metal objects to remove residues or coffee deposits as they could scratch metal or plastic surfaces.
- None of the components of the appliance can be washed in a dishwasher with the exception of the drip tray (A13) and cup grilles (A10) and (A11).
- If the appliance was not used for more than a week, before using it again, we recommend you perform a rinse cycle as described in section "3. Setting up the appliance".

Danger!

- While cleaning, never immerse the coffee maker in water. It is an electrical appliance.
- Before cleaning the outside of the appliance, turn it off, unplug from the mains socket and allow to cool.




13.2 Cleaning the drip tray

The drip tray is fitted with a level indicator (A14) showing the amount of water it contains. Before the indicator protrudes from the cup tray, the drip tray must be emptied and cleaned, otherwise the water may overflow the edge and damage the appliance, the surface it rests on or the surrounding area.

1. Remove the drip tray (fig. 33).
2. Remove the cup grille (A11), drip tray grille (A12) and level indicator (A14), empty the water and clean all the components with a cloth, then reassemble the drip tray.
3. Put the drip tray back in place.

13.3 Cleaning the espresso cup grille

1. Extract the grille (A10) by pulling it from the left, then removing it from the support (fig. 34).

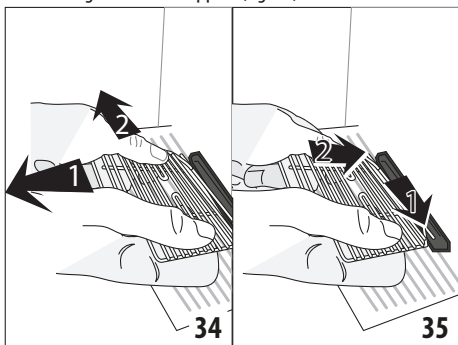


2. Clean the support with a cloth and wash the grille (dishwasher safe).
3. Put the grille back on the support from the right side, then push until it is correctly attached (fig. 35).

13.4 Coffee filter cleaning and maintenance


The coffee filters are designed to obtain the best possible coffee froth. For best results, the filters must always be clean and free from all coffee residues.

After using the appliance, always rinse the filters under abundant running water (fig. 36), pushing the perforated filter to make sure it is always correctly inserted in its housing (fig. 37); make sure the hole underneath (shown in fig. 40) is free from all residues.

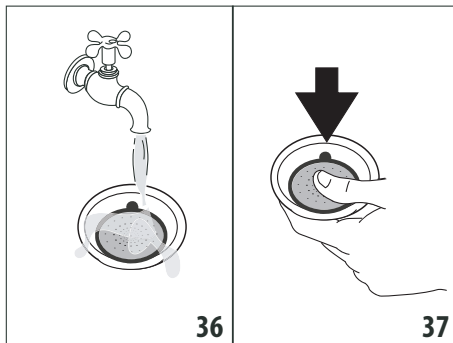


If still dirty, and in any case always at least once a month, clean the coffee filters thoroughly:

1. Remove the perforated filter from filter housing by pulling the tab (fig. 38).

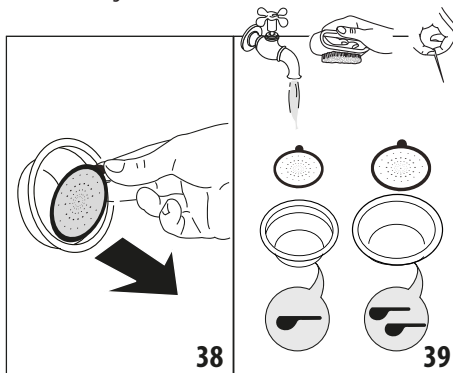

2. Rinse the filters under running water (fig. 39).
3. Make sure the holes are not clogged. If necessary, clean with a pin or needle (fig. 39-40).
4. Dry all the components with a cloth.
5. Put the perforated filter back in the housing and press as far as it will go (fig. 37).

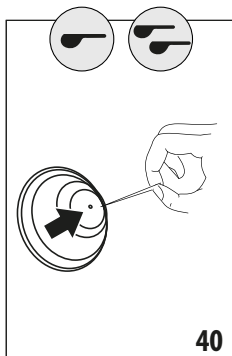

13.5 Cleaning the boiler outlet

After every 200 coffees, rinse the boiler outlet. Press the  rinse button (B4) and deliver about 200 ml/ 6.76 fl oz of water.

13.6 Cleaning the water tank

1. Remove the filter (*if present) and rinse with running water.
2. Clean the water tank regularly (about once a month) and whenever you replace the water softener filter (C6) (*if present) with a damp cloth and a little mild washing up liquid, then rinse thoroughly.
3. Replace the filter (*if present), fill the tank with fresh water and replace the tank.
4. (Models with water softener filter only) Deliver about 100 ml/ 3.4 fl oz of water.

Danger!


While cleaning, never immerse the coffee maker in water. It is an electrical appliance.

13.7 Cleaning the bean container

Without extracting it, clean the bean container regularly with a cloth.

For more thorough cleaning, proceed as follows:

1. Make sure the bean container (A2) is empty. If necessary, operate the coffee mill without beans to empty it:
2. Release the bean container by turning it counterclockwise and extract from the appliance.




3. Wash the container and lid (A1) with warm water. Do not wash the components in a dishwasher or use washing up liquid! Dry all accessories thoroughly before using again.
4. Remove coffee residues (fig. 41);
5. Clean the bean container housing with a damp cloth and dry;

6. Put the container back as described in section "3. Setting up the appliance".


13.8 Cleaning the burrs

When cleaning the bean container, clean the container housing and upper burr with a damp cloth. The burr can be removed and replaced when worn. Contact an authorised customer services centre. You may also need to remove the burr if it becomes blocked with foreign matter. If this occurs, clean as follows:

1. Empty the bean container (if necessary, using a vacuum cleaner to remove any remaining beans).
2. Attach the portafilter and operate the grinder without beans to free the coffee guide, then attach the portafilter to the outlet of the coffee grinder (A22), lining it up with "INSERT", then turning it to the right (fig. 18). Grinding begins when the portafilter reaches the CLOSE position and stops automatically;
3. Turn the appliance off;
4. Remove the bean container as described in the previous section "13.7 Cleaning the bean container".

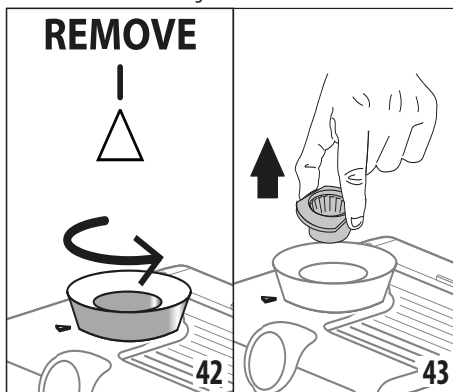


5. Turn the fineness selector counterclockwise as far as it will go to the "REMOVE" position (fig. 42).



6. Extract the upper burr, gripping it by the handle (fig. 43).
7. Clean the burr with a brush (fig. 44) and remove the coffee residues using a vacuum cleaner (fig. 41).

8. Put the upper burr back in place:

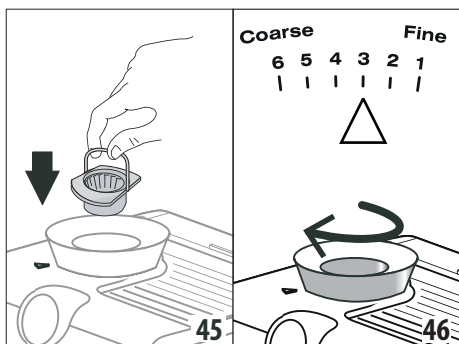


- Insert the burr in its housing (fig. 45);
 - Turn the selector to select the desired grinding level (fig. 46);
 - Make sure the burr is inserted correctly by pulling it by the handle. If it is correctly inserted, it will not move;
9. Use a brush to remove any coffee residues from the outlet of the coffee grinder (A22).

13.9 Replacing the burrs


Over time, the burrs will wear down. If you are unable to achieve the ideal quantity of coffee outlined in section "4.5 Adjusting the quantity of ground coffee in the filter", contact De'Longhi Customer Service (see "www.delonghi.com").

13.10 Cleaning the "Smart tamping station"

To guarantee top quality grinding, clean the "Smart tamping station" regularly as follows:

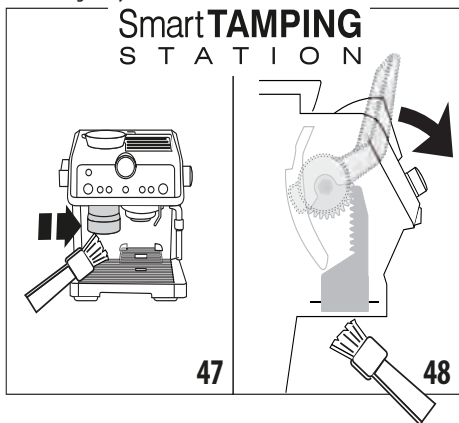

1. Clean the attachment area with a brush (fig. 7).
2. Pull the **lever** (A23) as far as it will go and clean the presser cylinder with a brush (fig. 48). Then release the lever.
3. Use the tube brush (C8) to clean the coffee guide (fig. 49).

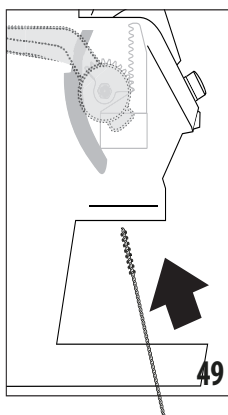

13.11 Other cleaning operations

1. Do not use solvents or abrasive detergents to clean the coffee maker. Use a soft damp cloth only.
2. Clean the portafilter cup.
3. You are recommended to use De'Longhi detergent.

14. DESCALING

Descalc the appliance when the light (B9) comes on.

- Before use, read the instructions and the labelling on the descaler pack.
- It is important to use De'Longhi descaler only. Using unsuitable descaler and/or performing descaling incorrectly may result in faults not covered by the manufacturer's guarantee.

Proceed as follows:




1. (IF PRESENT, REMOVE THE WATER SOFTENER FILTER). Pour the descaler into the tank up to the level **A** marked inside the tank (equal to one 100ml/3.3 fl oz packet), then add water (litre) up to the level **B**.
2. If the appliance is off, press the ON/Standby button (B1).
3. Make sure the portafilter is not attached and position a recipient under the spouts (A5), (A6) and the boiler outlet (A21) (fig. 8).
4. Turn the mode selector dial (B8) to the position. The light flashes and the "OK" light comes on.
5. Press "OK" (B5) to start descaling.
6. The descale programme starts and the descaler liquid comes out of the spouts and boiler outlet. The descale programme removes limescale deposits from inside the appliance by automatically performing a series of rinses and pauses until the tank is empty.
7. Delivery stops and the (B15) and lights corresponding to the rinse button (B4) come on.
8. Empty the recipient used to collect the descaler solution and replace it empty under the spouts.
9. Remove the water tank, empty any residues of descaler solution, rinse with running water and fill with fresh water up to the MAX level. Put the tank back in its housing.

10. Press the  button. The appliance rinses the internal circuits and delivers water from all three spouts.
11. When rinsing is complete, delivery stops. All the LEDs flash briefly and the appliance prepares to be used again.
12. Empty the recipient used to collect the rinse water.
13. Extract and empty the drip tray, then put back in the appliance.
14. Extract the tank, fill with fresh water, then put back in the appliance.
15. Turn the mode selector dial to one of the coffee positions.

15. TECHNICAL DATA

Voltage:	120V-60Hz
Power:	1450W
Size LxDxH:	375x368x445 mm/ 14.8x14.4x17.5 in
Pressure:	19 bar
Water tank capacity:	2 L/67.6 fl oz
Cord length:	1200 mm/47.21 in
Weight:	12 kg/ 26.4 lbs

16. HOW TO MAKE PERFECT COFFEE

PERFECT ESPRESSO	UNDER-EXTRACTED COFFEE	OVER-EXTRACTED COFFEE
		
CREMA: Nut-brown colored with dark lights and light-coloured streaks, 3-4 mm/ 0.11-0.15 in thick	CREMA: Clear and thin with large bubbles	CREMA: Dark and thin, only at the edges
BODY: Dense, full-flavoured and smooth	BODY: Thin, watery	BODY: Excessive
TASTE: Well-balanced and lingering	TASTE: Weak and short-lived	TASTE: Strong, astringent, lingering and bitter on the palate
AROMA: Intense	AROMA: Not pronounced	AROMA: Weak, with a hint of burnt coffee
GRINDING LEVEL: Correct	GRINDING LEVEL: Too coarse. Adjust the mill to a lower position, following the instructions in section "4.4 Adjusting the quantity of ground coffee in the filter"	GRINDING LEVEL: Too fine. Adjust the mill to a higher position, following the instructions in section "4.4 Adjusting the quantity of ground coffee in the filter"
COFFEE QUANTITY: Correct 	QUANTITY of coffee in filter: Not enough. Increase the quantity by turning the dial "B2. Ground coffee quantity dial" as described in section "4.4 Adjusting the quantity of ground coffee in the filter"	QUANTITY of coffee in filter: Too much: reduce the quantity by turning the dial "B2. Ground coffee quantity dial" as described in section "4.4 Adjusting the quantity of ground coffee in the filter"

17. EXPLANATION OF LIGHTS

LIGHTS	EXPLANATION OF LIGHTS	OPERATION
All the lights flash briefly	Turning the machine on	Self-diagnosis
 on	Insufficient water in tank or water tank not inserted correctly	Fill the tank or extract the tank and put it back correctly
	Energy saving is enabled	See section "12.5 Energy saving" if you want to disable the function
 on	The appliance is on and ready for use	The appliance is at the right temperature to deliver steam. To deliver steam, turn the steam dial (A4)
 flashing	The appliance is on and energy saving is enabled. The steam dial (A4) is in the steam delivery position	The light flashes to indicate that the appliance is preparing to deliver steam. Delivery begins as soon as the appliance is at temperature
	The appliance is heating up to be ready for use	The appliance is at temperature when the light remains on steadily
	Steam delivery has ended and the steam dial (A4) is in the steam position	Turn the dial to the  position.
 flashing	The portafilter has been detached from the coffee mill without pressing	Detach the portafilter and press the coffee as described in section "7. Using pre-ground coffee"
	Pressing is needed	The coffee has just been ground and the portafilter is attached to the coffee mill
 on	Pressing has been performed correctly	
 on	The bean container is empty	Fill the bean container
 flashing	The bean container is not inserted or is not correctly screwed in place, or the selector on the bottom of the container is not in a position from 1 to 6.	Put the bean container in the appliance correctly
 flashing	The appliance is too hot to make coffee	Wait for it to cool
 flashing	Descaling is underway	Complete the operation as described in section "14. Descaling"
	Descaling has ended and the dial (B8) is in the "descaling" position	Turn the mode selector dial to one of the "coffee positions"

18. ALARMS



LIGHTS	ALARM	SOLUTION
 on	General alarm	Machine needs service. Contact Customer Services
 +  flashing	The drip tray (A13) is missing or has not been inserted correctly	Extract the drip tray then put back correctly in the appliance
 on	Descaling must be performed	Descalc the appliance as described in section "14. Descaling"
 flashing quickly	The dial (B8) is in the descaling position	Turn the dial to one of the beverage positions
 +  flashing	The portafilter has been detached before grinding has ended or pressing has been performed too quickly	Repeat grinding
	The coffee grinder coffee guide is clogged	Clean as described in section "13.10 Cleaning the "Smart tamping station"" and section "19. Troubleshooting" in correspondence to fig. 50.
	The burrs are blocked by foreign matter	Remove the foreign matter and clean the burrs as described in section "13.8 Cleaning the burrs".
 +  flashing	The machine is being turned on for the first time and the water circuit must be filled.	Proceed as described in section "3. Setting up the appliance"
	If the water softener filter (C6) is present, an air bubble may have been released inside the circuit, obstructing delivery	Remove water softner filter and press the button (B6) corresponding to the  light (fig. 9). Delivery begins and stops automatically. Reinsert water softner as described in section "11. Activating the water softener filter".
	The grinding is too fine and the coffee is delivered too slowly or not at all	Extract the portafilter and repeat the operations to make the coffee, bearing in mind the indications in section "4.4 Adjusting the quantity of ground coffee in the filter" and table "16. How to make perfect coffee".
	The tank has been inserted incorrectly and the valves on the bottom are not open	Press the tank down lightly to open the valves on the bottom
	Scale in the water circuit	Descalc as described in section "14. Descaling"
...→		

LIGHTS	ALARM	SOLUTION
 +  flashing	If the water softener filter (C6) is present, an air bubble may have been released inside the circuit, obstructing delivery	Remove water softener filter and press the button (B6) corresponding to the  light (fig. 9). Delivery begins and stops automatically. Reinsert water softener as described in section "11. Activating the water softener filter"
	The grinding is too fine and the coffee is delivered too slowly or not at all	Extract the portafilter using caution. Remove any cup or glass from the tray. Hold firmly the portafilter and remove it slowly. Then repeat the operations to make the coffee, bearing in mind the indications in section "4.2 Select the coffee grinding (coarse to fine)" and the "16. How to make perfect coffee" table.
	Excessive coffee dosage in the filter caused overpressure and the coffee is delivered too slowly or not at all	
	The filter is blocked, or the perforated filter is missing	Clean as described in section "13.4 Coffee filter cleaning and maintenance" and make sure the perforated filter is put back correctly
	The tank has been inserted incorrectly and the valves on the bottom are not open	Press the tank down lightly to open the valves on the bottom
	Scale in the water circuit	Descale as described in section "14. Descaling"
 +  flash briefly at regular intervals	The dial (B2) has been turned to the maximum adjustment possible 	When not enough coffee is ground to reach the perfect coffee dose, contact De'Longhi Customer Service who will guide you to reach the perfect dose again (see "www.delonghi.com")

19. TROUBLESHOOTING

PROBLEM	CAUSE	SOLUTION
No espresso coffee is delivered	No water in the tank (A17)	Fill the tank
	The  light is on and the  light is flashing to indicate that the coffee or steam circuit is empty.	Press the button corresponding to the  light to fill the circuit.
	The filter is blocked, or the perforated filter is missing	Clean as described in section "13.4 Coffee filter cleaning and maintenance" and make sure the perforated filter is put back correctly
	The tank has been inserted incorrectly and the valves on the bottom are not open	Press the tank down lightly to open the valves on the bottom
	Scale in the water circuit	Descale as described in section "14. Descaling"
...→		

PROBLEM	CAUSE	SOLUTION
The portafilter cannot be attached to the appliance	The ground coffee has not been pressed or is too much	Clean as described in section "4.3 Grind the coffee directly into the filter"
The espresso coffee drips from the edges of the portafilter rather than the holes	The portafilter is inserted incorrectly	Attach the portafilter correctly and rotate firmly as far as it will go
	The espresso boiler gasket has lost elasticity or is dirty	Have the espresso boiler gasket replaced by Customer Services
	The filter is clogged, or the perforated filter is missing or dirty	Clean as described in section "13.4 Coffee filter cleaning and maintenance"
The coffee crema is too light (delivered from the spout too fast)	The appliance settings need reviewing	See section "16. How to make perfect coffee"
The coffee crema is too dark (delivered from the spout too slowly)	The appliance settings need reviewing	See section "16. How to make perfect coffee"
No milk froth is formed when making cappuccino	The ring (A7) is in the "FLAT" (NO FROTH) position	Push the ring into the "FOAM" position
	Milk not cold enough	Always use semi-skimmed milk at refrigerator temperature.
	The frothing wand (A8) is dirty	Clean the frothing wand as described in section "10. Cleaning the frothing wand after use"
	Scale in the water circuit	Descale as described in section "14. Descaling"
At the end of descaling, the appliance requests a further rinse	During the rinse cycle, the water tank has not been filled to the MAX level	Repeat the rinse cycle from point (8) of section "14. Descaling"
The appliance does not grind the coffee	There is foreign matter that cannot be ground in the coffee mill	Clean the burrs as described in section "13.8 Cleaning the burrs", making sure you remove all the beans from the bean container (A2) before extracting it. Before putting the burr back, vacuum all residues from the housing (fig. 44).
...→		

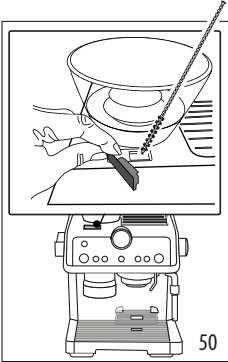PROBLEM	CAUSE	SOLUTION
If you want to change the type of coffee	You must remove all the beans present in the machine	• Empty the bean container (if necessary, operate the coffee mill without beans or use a vacuum cleaner to remove any remaining beans). • Attach the portafilter and operate the coffee mill a number of times without beans to free the coffee guide. Attach the portafilter to the outlet of the mill (A22), lining it up with "INSERT", then turning it to the right (fig. 22). Grinding begins when the portafilter reaches the CLOSE position and stops automatically. Repeat until the filter is empty. • Place the new coffee in the bean container. • If the amount of coffee ground is not enough to reach the "perfect quantity", proceed as described in section "4.4 Adjusting the quantity of ground coffee in the filter".
After grinding, the coffee filter is empty After grinding, there is too much coffee in the filter	The coffee mill coffee guide is clogged	Clean as described in section "13.10 Cleaning the "Smart tamping station". If the problem persists, access the guide by opening the hatch and free it using the brush (fig. 50). 
After grinding, the ground coffee in the filter does not reach the "perfect amount of coffee" 	The "Smart Tamping Station" needs cleaning The quantity of ground coffee needs adjusting Over time the burrs wear down	Clean as described in section "13.11 Cleaning the "tamping station", then grind again. Adjust the quantity of coffee with the dial (B2), following the instructions in section "4.4 Adjusting the quantity of ground coffee in the filter". If the dial is already in the max. position, contact De'Longhi Customer Service who will guide you to reach the perfect dose again (see "www.delonghi.com") Contact De'Longhi Customer Service who will guide you to reach the perfect dose again (see "www.delonghi.com")