


ASSEMBLY INSTRUCTIONS

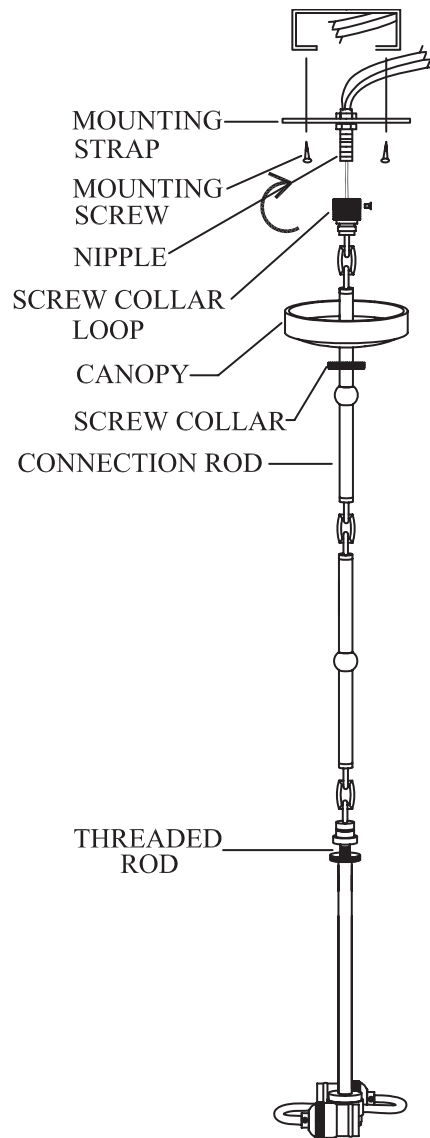

Goodman Large Hanging Lamp

Item # TOB5014

WE RECOMMEND INSTALLATION OF THIS LIGHTING FIXTURE BE DONE BY A LICENSED ELECTRICIAN.

WARNING * SWITCH OFF THE MAIN ELECTRICAL SUPPLY FROM THE MAIN FUSE BOX/CIRCUIT BREAKER BEFORE INSTALLATION.**


INSPECT ITEM CAREFULLY BEFORE ATTEMPTING TO INSTALL. IF THERE IS ANY DAMAGE OR OBVIOUS DEFECT, DO NOT INSTALL.

ITEM MAY NOT BE RETURNED ONCE IT HAS BEEN INSTALLED.

1. Screw fixture stem onto threaded rod on top of fixture body.
2. Attach ceiling box strap to ceiling outlet box using proper size screws and tighten securely.
3. Attach nipple into ceiling box strap and lock into place using included nut. Attach screw collar loop to nipple and lock into place using included nut. Be certain to use the canopy and screw collar to check that it will fit flush before locking everything into place.
4. Install canopy against ceiling and loosely install screw collar.
5. Loosen the screw collar from the loop and slip it and the canopy down over the connection rods.
6. Attach the steel support cable (if applicable) to the structure of the house. Separate the power wires coming from the fixture by gently pulling them apart from one another. You will need to separate at least 8".
7. Strip 5/8" insulation from each of the two power wires coming from the fixture using properly gauged wire strippers.
8. Attach ground (copper or silver in color) fixture wire to ground wire from ceiling outlet box (usually green or copper in color), and fasten together with a plastic wire connector. Tightly wrap the wire connector with electrical tape so the end of the connector is sealed.

IT IS IMPERATIVE THAT THE OUTLET BOX IN YOUR HOME BE PROPERLY GROUNDED.
9. Connect the neutral (RIBBED, without any marking) fixture wire to the neutral (usually white) wire from ceiling outlet box. Fasten both wires together with a plastic wire connector and tightly wrap the wire connector with electrical tape.

ASSEMBLY INSTRUCTIONS

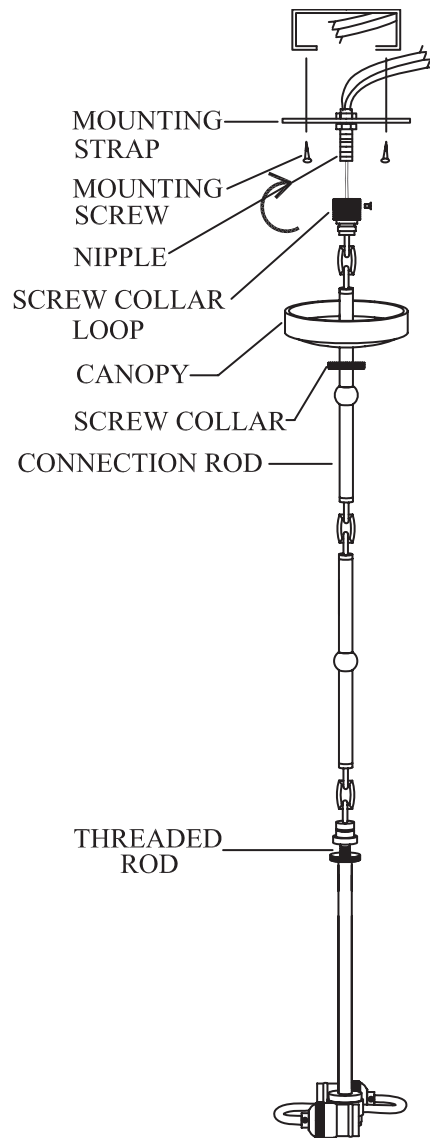

Goodman Large Hanging Lamp

Item # TOB5014

WE RECOMMEND INSTALLATION OF THIS LIGHTING FIXTURE BE DONE BY A LICENSED ELECTRICIAN.

WARNING * SWITCH OFF THE MAIN ELECTRICAL SUPPLY FROM THE MAIN FUSE BOX/CIRCUIT BREAKER BEFORE INSTALLATION.**

INSPECT ITEM CAREFULLY BEFORE ATTEMPTING TO INSTALL. IF THERE IS ANY DAMAGE OR OBVIOUS DEFECT, DO NOT INSTALL.

ITEM MAY NOT BE RETURNED ONCE IT HAS BEEN INSTALLED.

10. Repeat the procedure with the hot (ROUND, with UL marking on) wire to hot (usually black) outlet wire. Always make sure that no wire strands are left outside of the connections. DO NOT REVERSE THE HOT AND NEUTRAL CONNECTIONS OR SAFETY WILL BE COMPROMISED.
Tuck wire connections neatly into ceiling outlet box
11. Slip canopy to ceiling and secure with screw collar.
12. Clip lamp shade (not included) onto the threaded rod.
13. Insert light bulbs (not included) into the sockets.