
ASSEMBLY INSTRUCTIONS



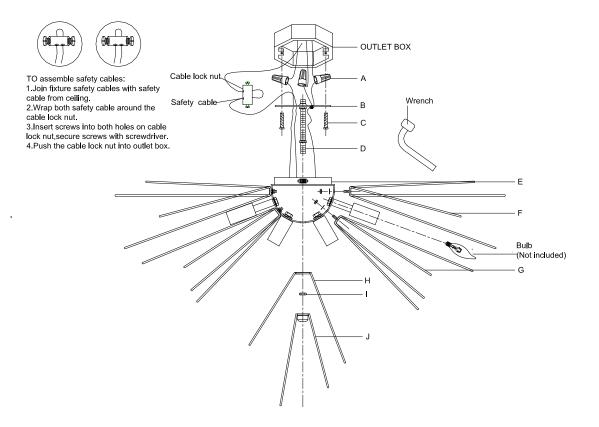

Item # KW 4070

WE RECOMMEND INSTALLATION OF THIS LIGHTING FIXTURE BE DONE BY A LICENSED ELECTRICIAN.

WARNING***SWITCH OFF THE MAIN ELECTRICAL SUPPLY FROM THE MAIN FUSE BOX/CIRCUIT BREAKER BEFORE INSTALLATION.

INSPECT ITEM CAREFULLY BEFORE ATTEMPTING TO INSTALL. IF THERE IS ANY DAMAGE OR OBVIOUS DEFECT. DO NOT INSTALL.

ITEM MAY NOT BE RETURNED ONCE IT HAS BEEN INSTALLED.

- 1. Carefully remove all parts from the box.
- 2. Remove the crossbar (B) from the fixture by loosening the bottom branch (J) & nut (I) & branch (H).
- 3. Affix crossbar (B) to outlet box and secure with mounting screws (C).
- 4. Attach branch (F) and (G) to metal ball (E), then secure with hex nut by wrench provided.
- 5. Insert bulbs (not included) into the sockets.
- Connect the hot wire (BLACK) from the fixture to the hot wire from the outlet box (usually BLACK). Fasten them together with a plastic wire connector (A) provided and wrap the connection with electrical tape.
- 7. Repeat this procedure for the neutral wire (WHITE) from the fixture to the wire from the outlet box (usually WHITE).
 - DO NOT REVERSE THE HOT AND NEUTRAL CONNECTIONS OR SAFETY WILL BE COMPROMISED.
- 8. Connect ground wire from the fixture (bare copper) to ground wire from the outlet box (usually green or copper in color).
 - IT IS IMPERATIVE THAT THIS FIXTURE BE GROUNDED.
- 9. Attach the fixture with branch (H) to the crossbar (B) and let threaded nipple (D) go through the center hole of the fixture, then tighten with hex nut (I).
- 10. Thread the branch (J) to the bottom of threaded nipple (D).
- 11. Installation is complete, turn on power at fuse or circuit breaker.










^{***}Clean with a dry, soft cloth only. Use no harsh abrasives or chemical agents.

ASSEMBLY INSTRUCTIONS

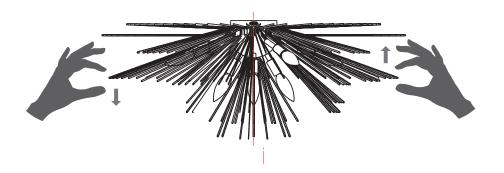

Strada Flush Mount

Item # KW4070

For a more personalized style you are able to gently bend spines in any direction.

NOTICE: BENDING SPINES MULITPLE TIMES CAN CAUSE THEM TO BREAK